MALE		FEMALE
PIN #	Wiring	PIN #
1	---------	1
2	---------	2
3	---------	3
4	---------	4

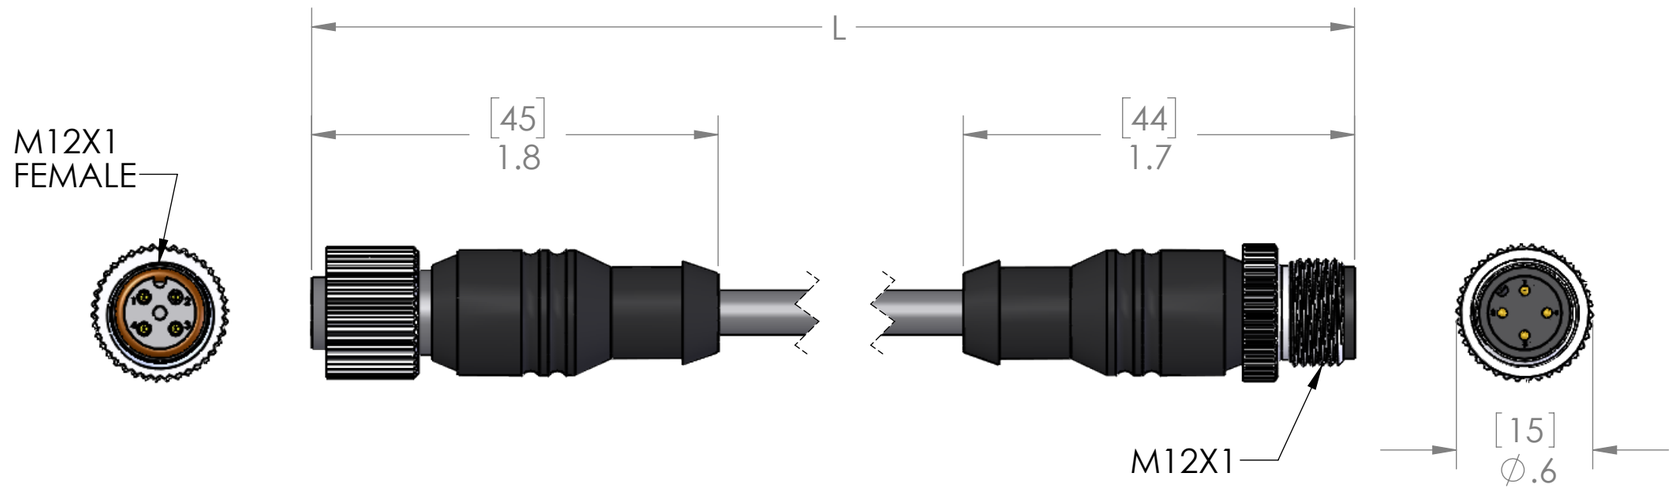

P/N	L	STD?
MDC-4MFP-0.5M-GY	20" [0.5M]	YES
MDC-4MFP-1M-GY	40" [1M]	YES
MDC-4MFP-2M-GY	79" [2M]	YES
MDC-4MFP-3M-GY	118" [3M]	YES
MDC-4MFP-4M-GY	157" [4M]	YES
MDC-4MFP-5M-GY	197" [5M]	YES
MDC-4MFP-6M-GY	237" [6M]	NO
MDC-4MFP-10M-GY	393" [10M]	YES
MDC-4MFP-15M-GY	590" [15M]	NO
MDC-4MFP-20M-GY	787" [20M]	NO
MDC-4MFP-30M-GY	1180" [30M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	GRAY PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/14/2023
CHECKED BY	JJH
CHECK DATE	06/14/2023

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MDC-4MFP-ZZ-GY | REV C

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1