WIRING		
FEMALE		MALE
PIN #		PIN #
1	-------	1
2	-------	2
3	-------	3
4	-------	4
5	-------	5

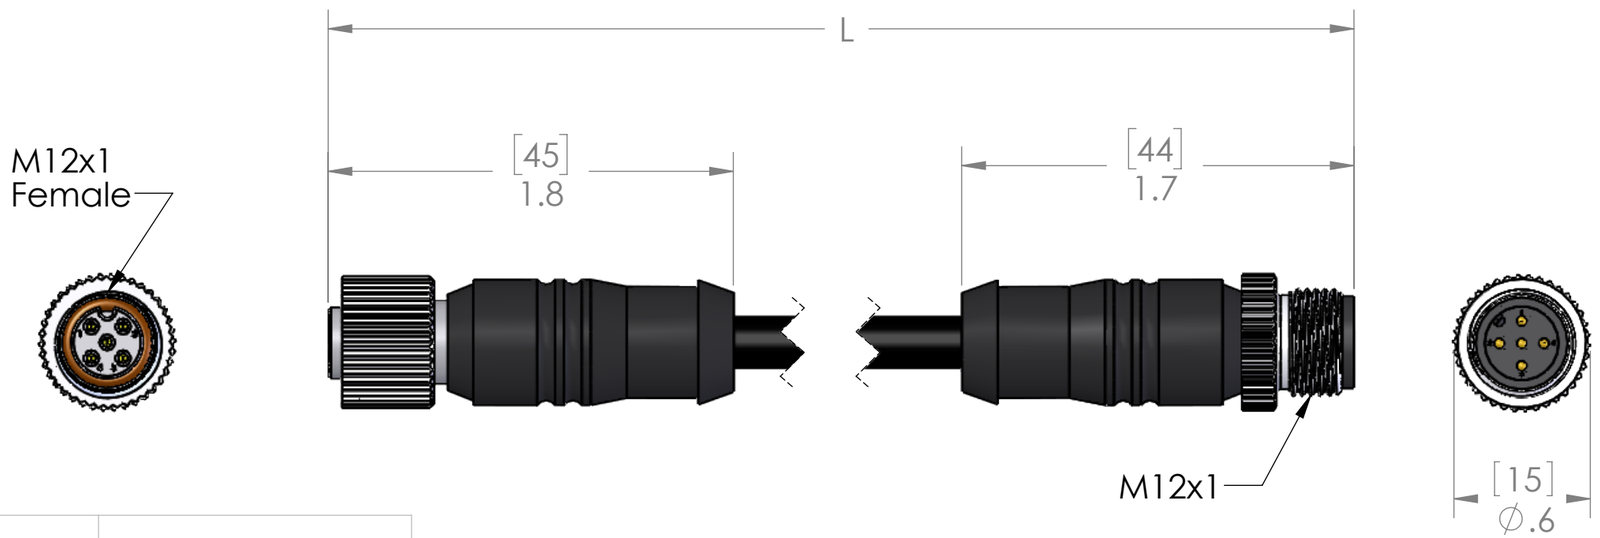

TABLE A		
P/N	L	STD?
MDC-5MFP-0.5M-B	20" [0.5M]	YES
MDC-5MFP-1M-B	40" [1M]	YES
MDC-5MFP-1.5M-B	59" [1.5M]	NO
MDC-5MFP-2M-B	79" [2M]	YES
MDC-5MFP-3M-B	118" [3M]	YES
MDC-5MFP-4M-B	157" [4M]	YES
MDC-5MFP-5M-B	197" [5M]	YES
MDC-5MFP-6M-B	236" [6M]	YES
MDC-5MFP-8M-B	315" [8M]	NO
MDC-5MFP-10M-B	393" [10M]	YES
MDC-5MFP-15M-B	590" [15M]	YES
MDC-5MFP-20M-B	786" [20M]	NO
MDC-5MFP-25M-B	983" [25M]	NO
MDC-5MFP-30M-B	1179" [30M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	BLACK PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/19/2023
CHECKED BY	JJH
CHECK DATE	06/20/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
5 PL MDC M-F EXT

SIZE	DWG. NO.	REV
B	MDC-5MFP-ZZ-B	B

SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1