



PIN #	COLOR		PIN #	COLOR
1	GRAY/PINK		8	GREEN
2	WHITE/GREEN		9	PINK
3	WHITE/YELLOW		10	WHITE
4	BROWN		11	RED/BLUE
5	BROWN/YELLOW		12	BROWN/GREEN
6	BLUE		13	GRAY
7	YELLOW		14	RED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	1/15/2015	BEM


BROWN AND BLUE ARE 18AWG [1.0 sqmm] WIRES
ALL OTHERS ARE 22AWG [0.34sqmm] WIRES

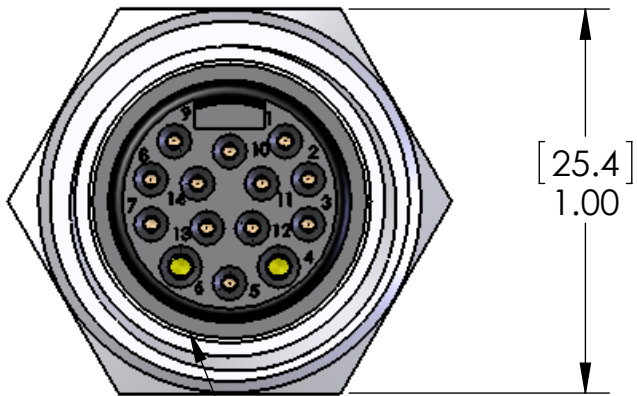

7/8-16 UN2B

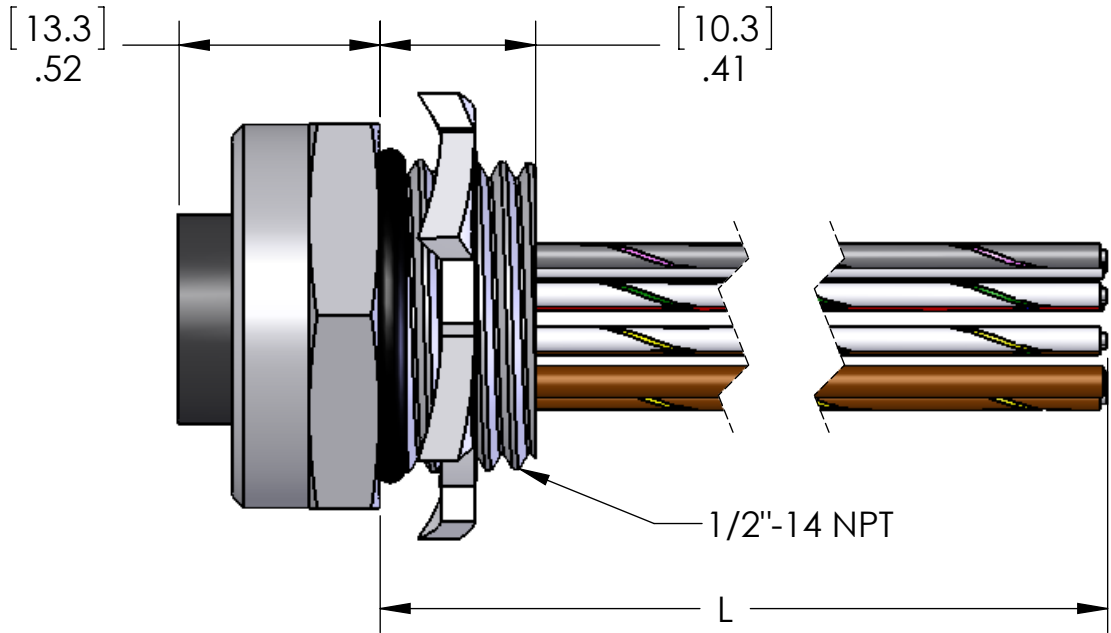

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" AND LONGER

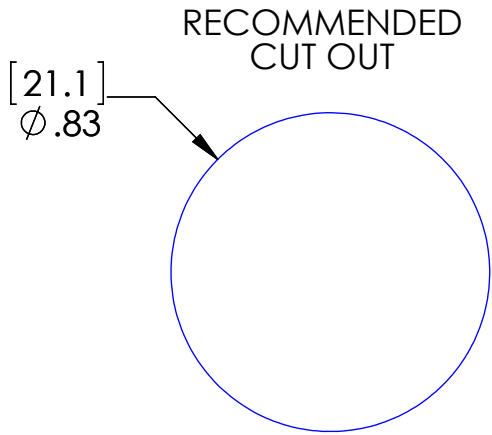

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	BLACK POLYAMIDE
WIRE:	18AWG & 22AWG UL1007
O-RING:	NBR
JAM NUT:	ZINC PLATED STEEL
IP RATING:	IP 67 WHEN FULLY MATED

APPROVALS	
U.S.	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	
AMPS	
TEMP	80C
APPLICATION	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	JJH
	CHECKED	
	ENG APPR.	
	MFG APPR.	
INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

TABLE A	
P/N	L
MIN-14FR-1	12" [305]
MIN-14FR-1M	40" [1M]
MIN-14FR-2M	79" [2M]
MIN-14FR-3M	118" [3M]
MIN-14FR-4M	157" [4M]
MIN-14FR-6M	240" [6M]

MENCOM CORPORATION

TITLE:		
SIZE	DWG. NO.	REV
B	MIN-14FR-ZZ	A
SCALE: 2:1		WEIGHT:
		SHEET 1 OF 1