
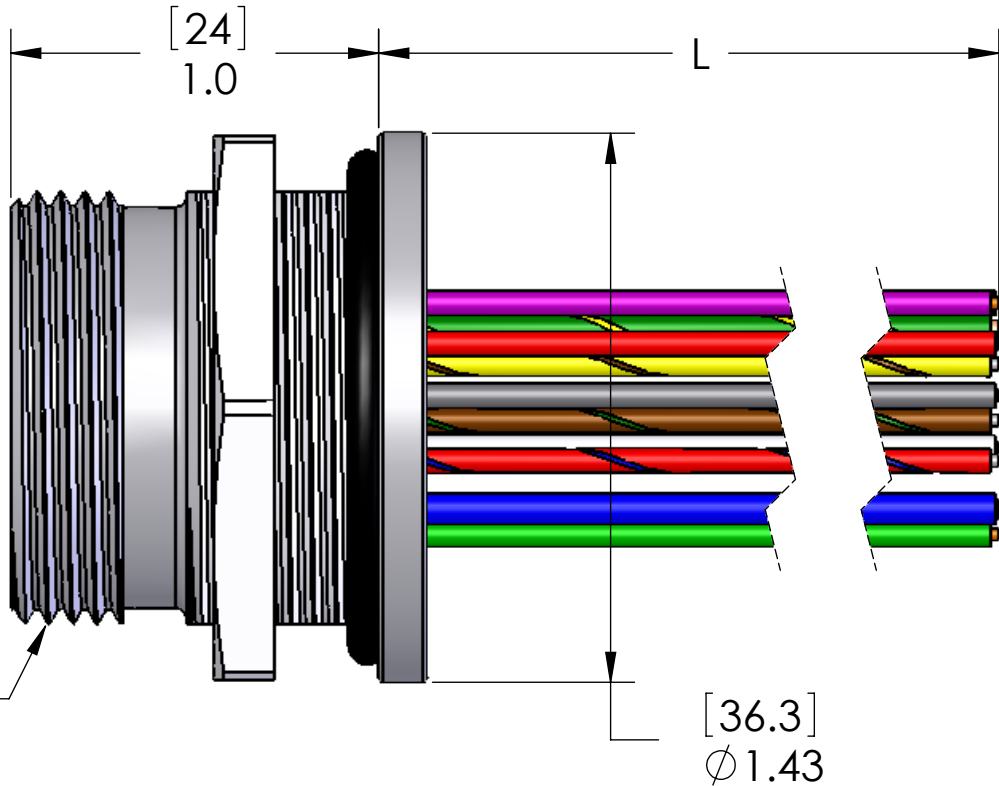


8			7		
PIN #	COLOR		PIN #	COLOR	
1	VIOLET		11	BLACK	
2	RED		12	GREEN/YELLOW	
3	GRAY		13	YELLOW w/BROWN	
4	RED w/BLUE		14	BROWN w/GREEN	
5	BLUE		15	WHITE	
6	GREEN		16	YELLOW	
7	BROWN		17	PINK	
8	WHITE w/GREEN		18	GRAY w/BROWN	
9	WHITE w/YELLOW		19	GRAY w/PINK	
10	WHITE w/GRAY				

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	10/5/2008	

PINS 5, 7 & 12 ARE 18AWG

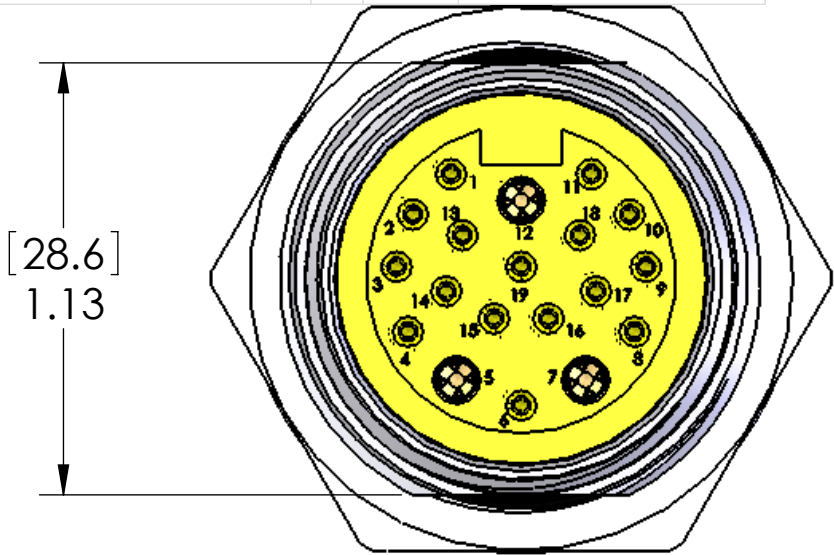

1.125-16 UN2A

[32.5]
Ø1.28

[32.5]
Ø1.28

[29.2]
1.15

CUT-OUT OPTIONS

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	18AWG & 22AWG UL1007/1569
O-RING:	NBR
JAM-NUT:	NICKEL PLATED BRASS

APPROVALS	
U.S.	UL LISTED
CANADA	C-UL LISTED

RATINGS:	
PIN 12	GROUND
PINS 5 & 7	300V, 4A
ALL OTHERS	300V, 2A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

TABLE A	
P/N	L
MIN-19FR-1-BM	12" [0.3m]
MIN-19FR-2-BM	24" [0.6m]
MIN-19FR-3-BM	36" [0.9m]
MIN-19FR-4-BM	48" [1.2m]
MIN-19FR-6-BM	72" [1.8m]
MIN-19FR-10-BM	120" [3.1m]
MIN-19FR-15-BM	180" [4.6m]
MIN-19FR-20-BM	240" [6.1m]

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-19FR-ZZ-BM	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1