



Profibus-PA Series Conduit Adapters

4 Conductor Profibus-PA Series Conduit Adapter




Conduit Adapters | 7/8"-16UN | M12 | 40 Volt, 4 amps | IP67 Rating

7/8"-16UN Conduit Adapters						
# of Poles	Faceview	Rating	# of Ports	Part Number	Body Style	Circuit
4	 7/8"-16UN 1 = ORANGE (+ V) 2 = GROUND 3 = BLUE (- V) 4 = BARE (SHIELD)	40V 4A	1 Port	PBIN-1-4FR-CA	 [47] 1.85 [44.2] 1.7 [104.4] 4.1 [109.5] 4.3 [131.3] 5.2	 S1 1 2 3 4
	 4 3 2 1 1 = ORANGE (+ V) 2 = GROUND 3 = BLUE (- V) 4 = BARE (SHIELD)		2 Port	PBIN-2-4FR-CA	 [47] 1.85 [44.2] 1.74 [104.4] 4.11 [109.5] 4.31 [131.3] 5.17	 S2 1 2 3 4 S1 1 2 3 4
M12 Conduit Adapters						
4	 M12 x 1 1 = ORANGE (+ V) 2 = GROUND 3 = BLUE (- V) 4 = BARE (SHIELD)	40V 4A	1 Port	PBDC-1-4FR-CA	 [47] 1.85 [43.2] 1.7 [104.4] 4.1 [109.5] 4.3 [131.3] 5.2	 S1 1 2 3 4
	 4 3 2 1 1 = ORANGE (+ V) 2 = GROUND 3 = BLUE (- V) 4 = BARE (SHIELD)		2 Port	PBDC-2-4FR-CA	 [47] 1.85 [43.2] 1.7 [104.4] 4.1 [109.5] 4.3 [131.3] 5.2	 S2 1 2 3 4 S1 1 2 3 4

Specifications:

Housing: Glass Filled PBT
Recp. Shell: Nickel Plated Brass
Insert: Polyamide
Contacts: Copper Alloy with Gold Plating
Gasket: NBR
Temperature: -40°C to 70°C (-40°F to +158°F)

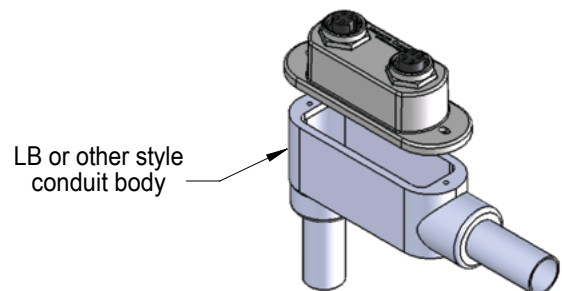

Remove existing Conduit Body cover and replace with Mencom Conduit Adapter.

Works with all standard 3/4" NPT conduit bodies, including Form 8 and Mark 9 adapters. (screws are included with adapter)