WIRING		
MALE		FEMALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4

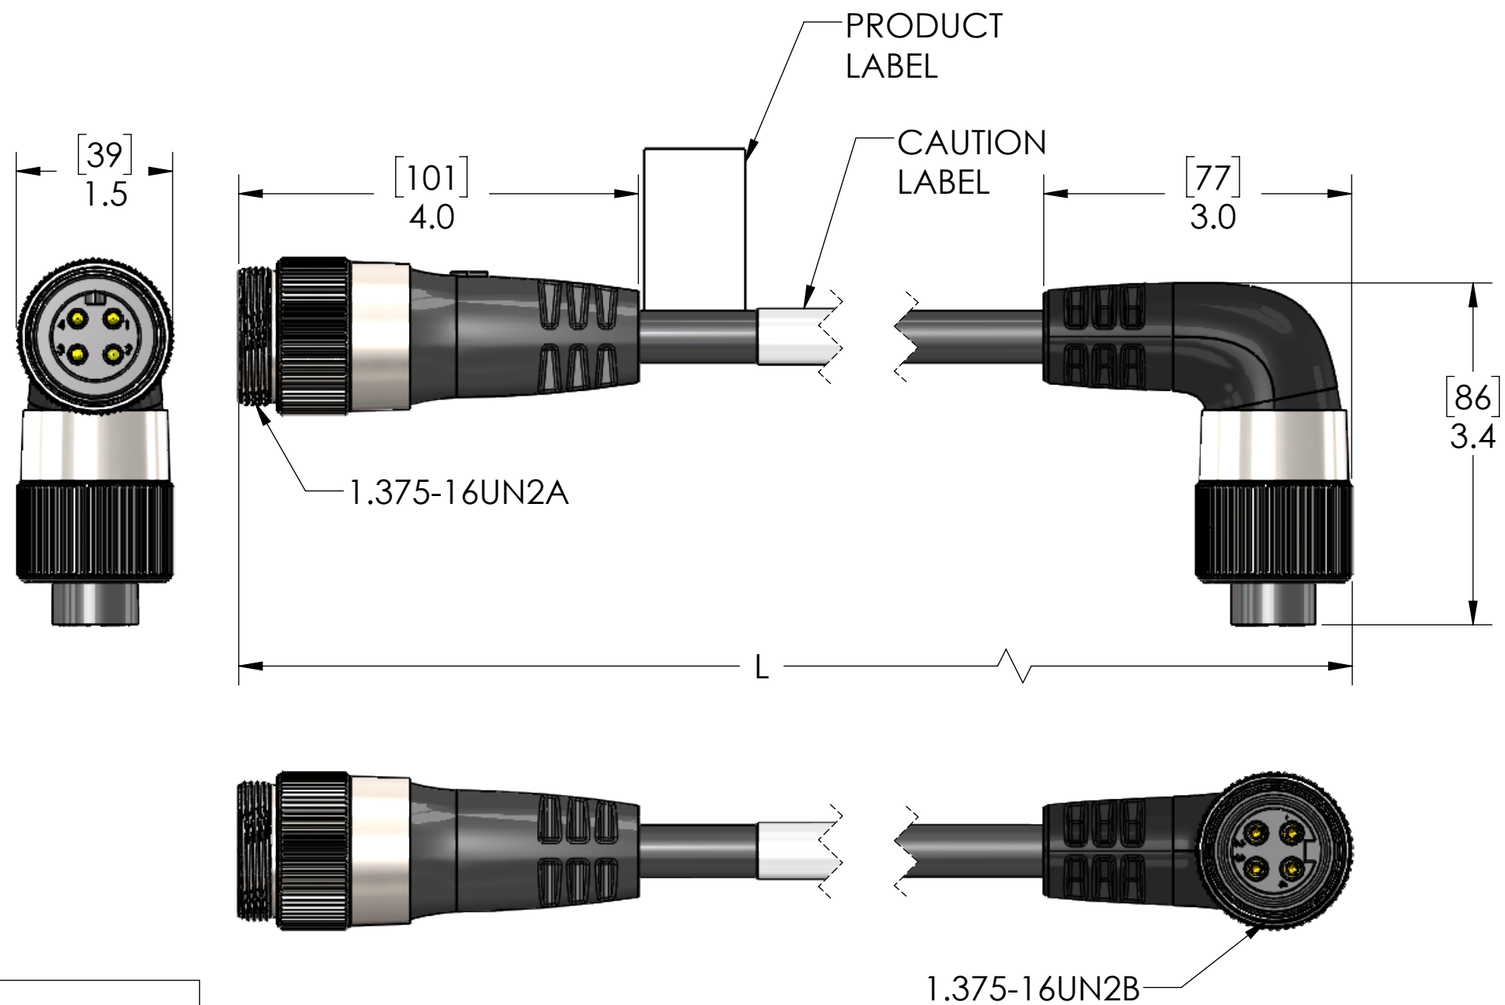

P/N	L	STD?
PMINW-40MFRP-1M-C011	40" [1m]	YES
PMINW-40MFRP-2M-C011	79" [2m]	YES
PMINW-40MFRP-3M-C011	117" [3m]	NO
PMINW-40MFRP-4M-C011	157" [4m]	YES
PMINW-40MFRP-5M-C011	197" [5m]	YES
PMINW-40MFRP-6M-C011	236" [6m]	NO
PMINW-40MFRP-8M-C011	315" [8m]	NO
PMINW-40MFRP-10M-C011	393" [10m]	YES
PMINW-40MFRP-15M-C011	590" [15M]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	TC-ER FT4
AWG:	10 AWG
JACKET:	BLACK TPE
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK PVC
RATINGS	
SCCR RATING:	65 kA Breakers and Fuses
RoHS COMPLIANT:	YES
PROTECTION:	IEC IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.:	UL 2237 LISTED, File E469485
CANADA:	C-UL 2237 LISTED, File E469485

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	40A
TEMP:	90°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	08/09/2023
CHECKED BY	ADM
CHECK DATE	08/10/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
4 PL R/A M-F EXT PLG
PMIN 10AWG TPE

SIZE	DWG. NO.	REV
B	PMINW-40MFRP-ZZ-C011	A

SCALE: 1:1.5 | WEIGHT: | SHEET 1 OF 1