

6

5

4


3

2

1

CATALOG NUMBER	MATERIAL NUMBER	DIAMETER RANGE		NOMINAL ROD DIAMETER	LENGTH "M"	LENGTH "B"	LENGTH "G" EYE CABLE THICKNESS REF.	COLOR CODE	APPROXIMATE BREAK STRENGTH* (LBS / N)	 UL LISTED	 CSA APPROVED	PRODUCT SELECTION NUMBER
		CONDUCTOR DIAMETER	ROPE** DIAMETER									
36610	1300950272	.19-.37 / 4.8-9.4	.25-.65 / 6.4-16.5	.43 / 10.9	24.00±2.50 / 609.6±63.5	10.00±1.00 / 254.0±25.4	.218 / 5.54	BLACK	6500 / 28913	NO	YES	PHS025
36611	1300950273	.38-.62 / 9.7-15.7	.50-.90 / 12.7-22.9	.75 / 19.1	36.00±3.50 / 914.4±88.9	13.00±1.50 / 330.2±38.1	.375 / 9.53	DARK GREEN	14400 / 64054			PHS050
36612	1300950274	.63-.87 / 16.0-22.1	.75-1.10 / 19.1-27.9	.87 / 22.1	48.00±4.50 / 1219.2±114.3	14.00±1.50 / 355.6±38.1	.437 / 11.10	RED	20000 / 88964			PHS075
36613	1300950275	.88-1.12 / 22.4-28.4	1.00-1.50 / 25.4-38.1	1.25 / 31.8	60.00±5.00 / 1524.0±127.0	15.00±1.50 / 381.0±38.1	.500 / 12.70	DARK BLUE	30600 / 136116			PHS100
36614	1300950276	1.13-1.37 / 28.7-34.8	1.25-1.70 / 31.8-43.2	1.50 / 38.1	76.00±6.00 / 1930.4±152.4	18.00±1.50 / 457.2±38.1	.625 / 15.88	YELLOW	46800 / 208177			PHS125
36615	1300950277	1.38-1.90 / 35.1-48.3	1.50-2.10 / 38.1-53.3	1.75 / 44.5	89.00±6.00 / 2260.6±152.4	24.00±1.50 / 609.6±38.1	.750 / 19.05	ALUMINUM	66500 / 295807			PHS150

* TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.
** FOR ROPE, SELECT SMALLEST SIZE GRIP WHICH MEETS REQUIRED WORK LOAD.

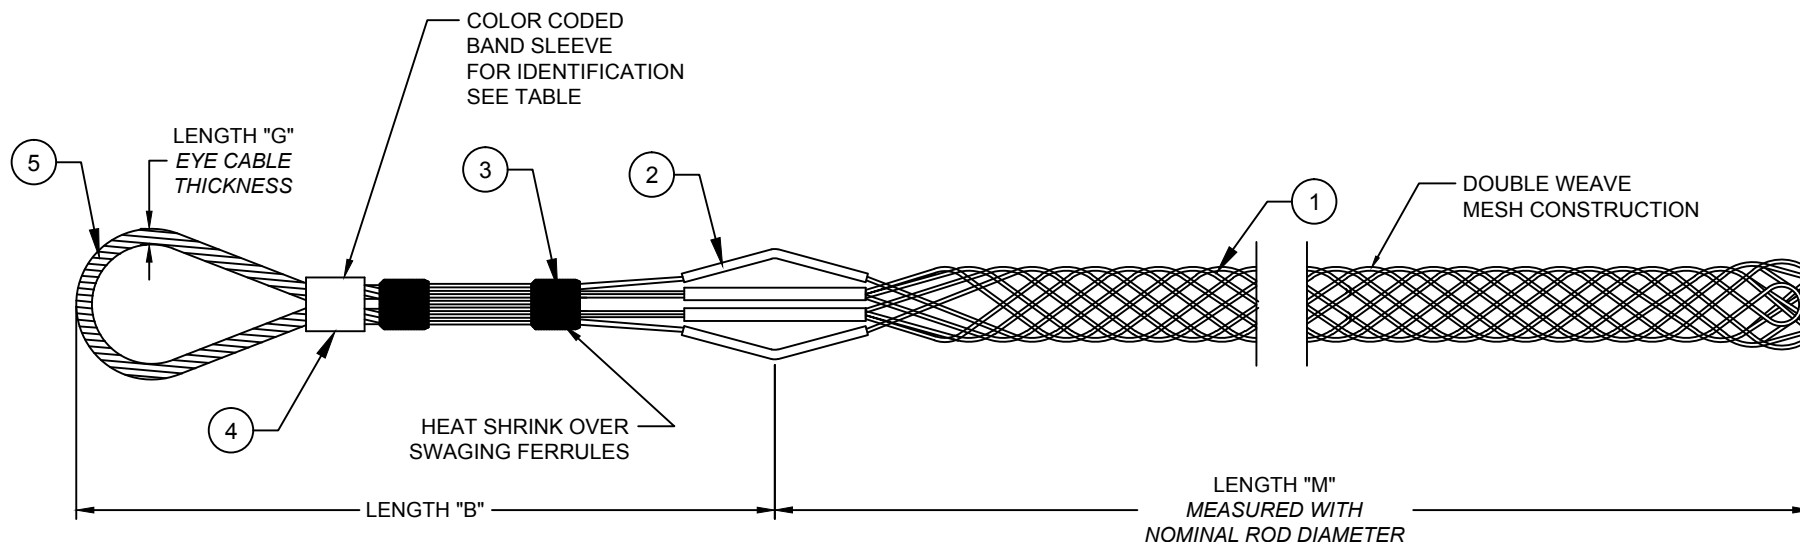

INSTRUCTION SHEET TO BE INCLUDED WITH GRIP.

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	GALVANIZED STEEL
2	SHOULDER PROTECTOR	ALUMINUM
3	SWAGING FERRULE	STAINLESS STEEL
4	BAND SLEEVE	ALUMINUM
5	BALE EYE	GALVANIZED STEEL

RELEASE SALES DRAWING EC NO: IGC2014-1924 DRWN: HRUIZ01 2014/09/04 CHKD: HKNEELAN 2014/09/04 APPR: JFMURPHY 2015/03/23	DESCRIPTION REV
A	

QUALITY SYMBOLS ▽=0 ▽C=0
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020
ANGULAR ±1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE INCH/MM	
DRAWN BY	DATE
HRUIZ01	2014/09/04
CHECKED BY	DATE
HKNEELAN	2014/09/04
APPROVED BY	DATE
JFMURPHY	2015/03/23
MATERIAL NO.	
SEE TABLE	
SIZE	
A	

SCALE NTS	DESIGN UNITS INCH		THIRD ANGLE PROJECTION
TITLE			
PULLING GRIPS HIGH STRENGTH FLEXIBLE EYE			
	MOLEX INCORPORATED		
DOCUMENT NO.			SHEET NO.
SD-130095-111			1 OF 1
CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX O SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

6

5

4

3

2

1