
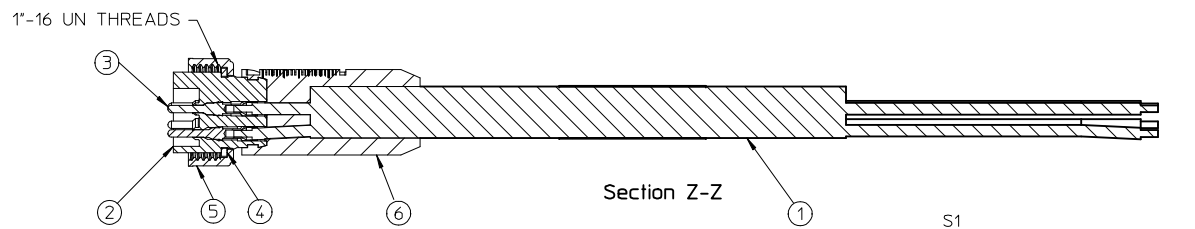



13	12	11	10	9
PART NUMBER	ENGINEERING NO.	LENGTH		
1300070049	206002A01F030	3' 0" +1.75 - 0 [.9M +44.5 - 0]		
1300070051	206002A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]		
1300070054	206002A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]		
1300070057	206002A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]		

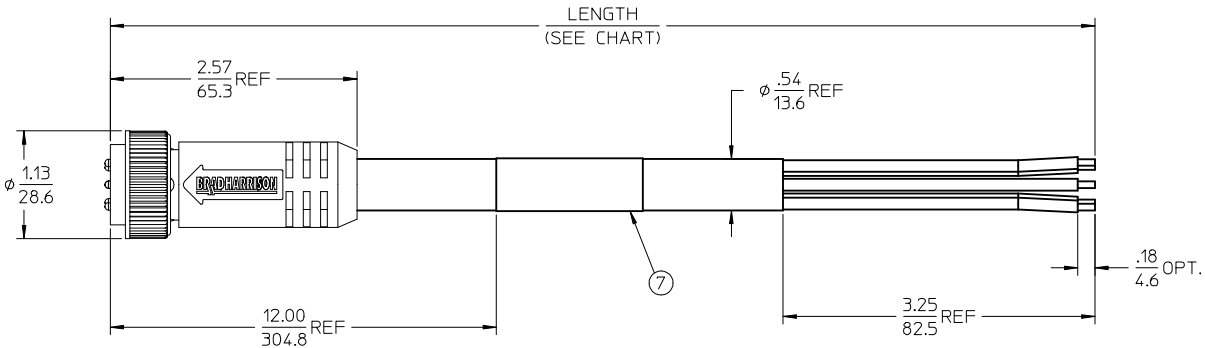

S1	
1	ORANGE
2	BLUE
3	BLACK
4	WHITE
5	RED
6	GREEN/YELLOW

WIRING DIAGRAM

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, C-SIZE 6 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 8 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

7	1	LABEL	PLASTIC FILM	BLACK/YELLOW
6	1	OVERMOLD	PVC	YELLOW
5	1	COUPLING NUT	ZINC DIE CAST	BLACK
4	1	FRICTION RING	NYLON	NATURAL
3	6	PIN CONTACT 16 AWG	BRASS	GOLD PLATED
2	1	INSERT, FEMALE, 6 POLE	PVC	YELLOW
1	1	CABLE, 16-6 ST00W/ST	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: WNA2009-0795 DRWN:BRUPERT 2009/06/02 CHKD:WOODMAN APPR:JFMURPHY 2009/06/10	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		mm INCH		DRAWN BY BRUPERT	DATE 2009/04/02	TITLE MINI-CHANGE CORD ASSY MALE, B-SIZE 6 POLE			
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± .01 1 PLACE ± 0.3 ± ---		CHECKED BY B. WOODMAN	DATE 2009/04/03				
		ANGULAR ± 1/2°		APPROVED BY J. MURPHY	DATE 2008/04/06	DOCUMENT NO. SD-130007-002			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
A		REV		SIZE C		SHEET NO. 1 OF 1			