


STAKON®

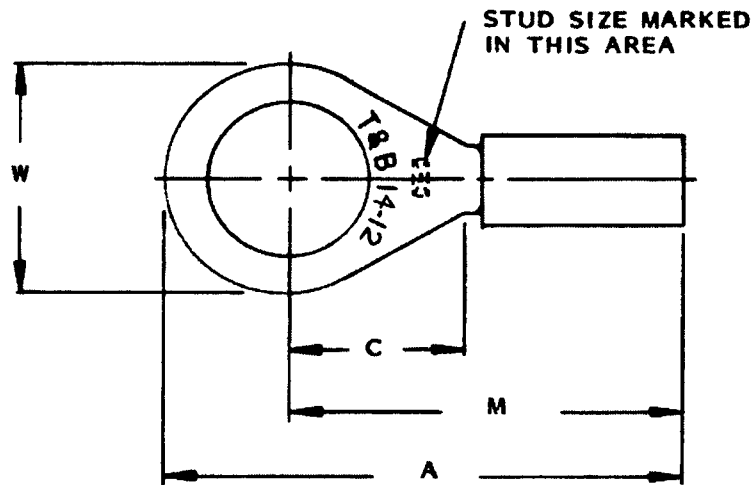

O.E.M. CAT. NO.	DISTR. CAT. NO.	STUD SIZE	W NOM.	A MAX.	C MIN. FLAT	M MAX.	MAX. WIRE INSUL. DIA.
RBC853Y	RBC14-6Y	#6	.25	1.02	.29	.89	.210
RBC863Y	RBC14-8Y	#8	.39	1.08	.29	.89	
RBC873Y	RBC14-10Y	#10	.39	1.08	.29	.89	
RBC713Y	RBC14-14Y	1/4	.51	1.14	.29	.89	
RBC723Y	RBC14-516Y	5/16	.54	1.25	.38	.98	
RBC793Y	RBC14-38Y	3/8	.63	1.30	.38	.98	
RBC753Y	RBC14-12Y	1/2	.76	1.53	.54	1.15	

MATERIAL: COPPER .052 THK.

FINISH: ELECTRO-TIN PLATE

WIRE RANGE: #14-12 UL LISTED

STRIPPING LENGTH 5/16 (+1/32 / -0)

INSTALLING TOOLS: ERG4001 (HAND TOOL)

BATT22-6 (BATTERY-POWERED CRIMPING TOOL)

BAIR22-6 (BENCH-MOUNTED AIR TOOL)

PAIR22-6 (PORTABLE AIR CRIMP TOOL),

DIE2001 (CRIMP DIES FOR BATT22-6, BAIR22-6, PAIR22-6)

CRIMP IN 12 - 10 NEST (YELLOW)

COLOR CODE: YELLOW NYLON INSULATOR

GENERAL NOTES

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

SEE ERN (****)
FOR APPROVAL SIGNATURES
& RELEASE DATE
PROJECT NO: ****

Thomas & Betts
www.tnb.com

DESCRIPTION:

**STA-KON NYLON INSULATED
RING TONGUE TERMINAL (HEAVY DUTY)**

ORIGINAL PROJECT NO / (ERN NO)

029D000455 / (2014461)

SHEET NO:

1 OF 1

REV. NO:

-

DRAWING NO:

WSD-001135