
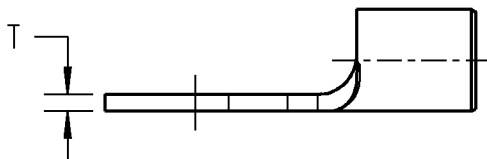



Sta-Kon

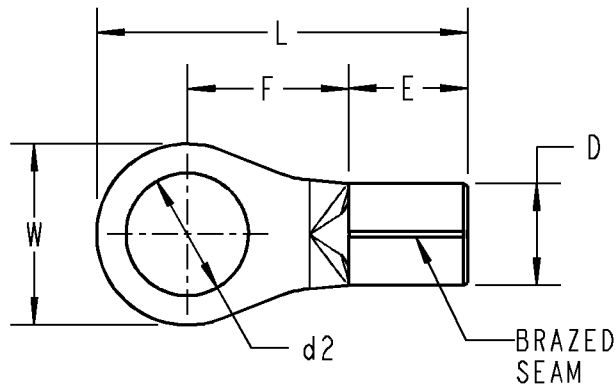

MATERIAL: COPPER
FINISH: ZINC PLATED
INTERNAL BARREL SERRATIONS
INSTALLATION TOOLS: TBM6 / TBM6S

ALL DIMENSIOIS ARE APPROXIMATE FOR REFERENCE ONLY.

T&B CAT. NO.	BOLT SIZE (IN)	WIRE SIZE (AWG)	d2 (IN)	D (IN)	E (IN)	F (IN)	L (IN)	W (IN)	T (IN)	PACK QTY.
K10-58R-D	5/8	10-12	.669	.220	.236	.992	1.858	1.260	.039	250
K8-58R-D	5/8	8	.669	.283	.335	1.008	1.949	1.244	.047	250
K6-58R-W	5/8	6	.669	.354	.413	.996	2.008	1.244	.059	250
K4-58R-CC	5/8	4	.669	.453	.472	.953	2.008	1.181	.067	250
K2-58R-CC	5/8	2	.669	.524	.551	.917	2.047	1.181	.071	100
K2-34R-CC	3/4	2	.827	.524	.551	.917	2.047	1.181	.071	100
K1/0-58R-CC	5/8	1/0	.669	.606	.709	.925	2.264	1.260	.071	100
K1/0-34R-CC	3/4	1/0	.827	.606	.709	.925	2.264	1.260	.071	100
K2/0-58R-C	5/8	2/0	.669	.689	.709	1.024	2.402	1.260	.079	25
K3/0-58R-L	5/8	3/0	.669	.768	.787	1.260	2.677	1.260	.091	25
K4/0-58R-L	5/8	4/0	.669	.870	.827	1.260	2.717	1.260	.106	25
K4/0-78R-L	7/8	4/0	.906	.870	.827	1.260	2.717	1.260	.106	25
K4/0-34R-L	3/4	4/0	.827	.870	.827	1.260	2.717	1.260	.106	25
K2-78R-CC	7/8	2	.906	.524	.551	.917	2.047	1.181	.071	100
K1/0-78R-C	7/8	1/0	.906	.606	.709	.925	2.264	1.260	.071	100

GENERAL NOTES

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

** SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: ****

www.tnb.com

DESCRIPTION:

RING TERMINALS - ABB
NON-INSULATED, BRAZED SEAM

ORIGINAL PROJECT NO / (ERN NO)

TM400023 / (2015714)

SHEET NO:

1 OF 1

REV. NO:

DRAWING NO:

WSD-001312

Thomas & Betts

A Member of the ABB Group