



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

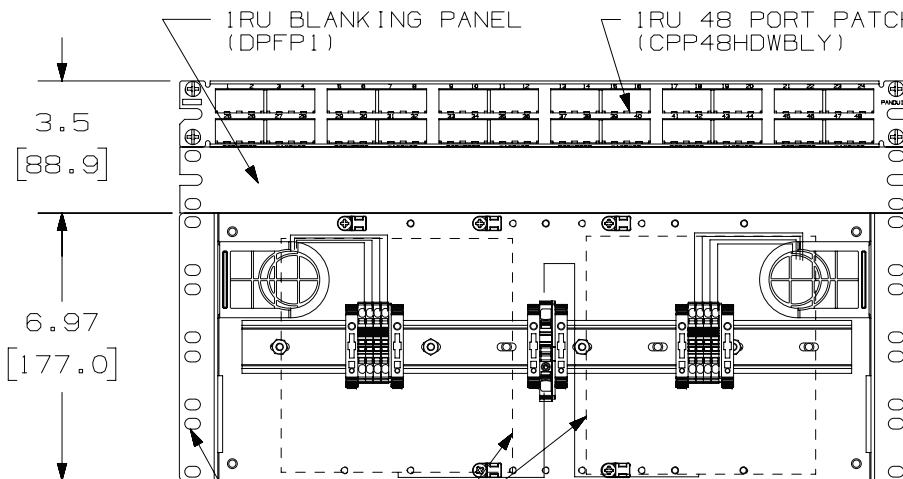

FRONT VIEW

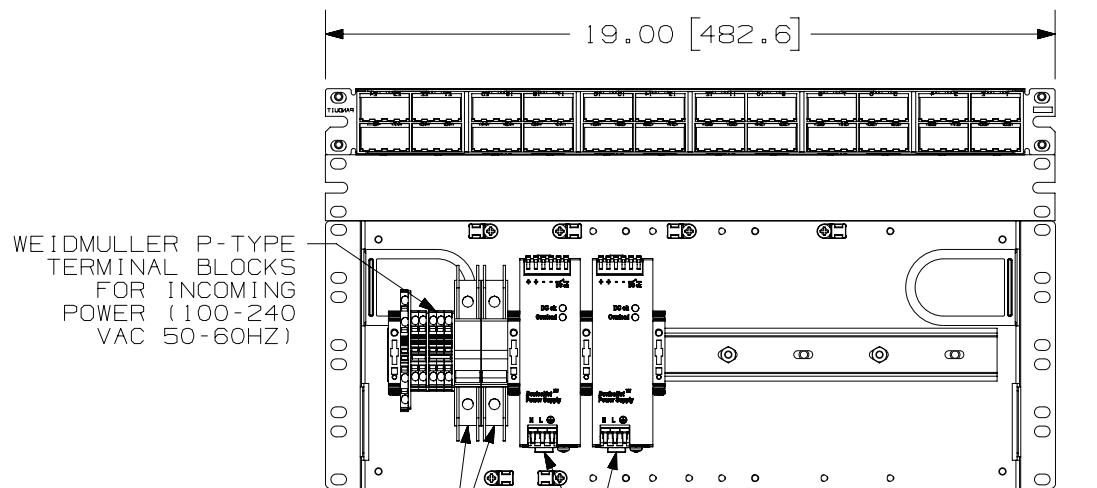

BACK VIEW

NOTES:

- PART INCLUDES:
 - (1) DIN RAIL MOUNT BRACKET (IABDIN4)
 - (2) PULS 91.2W 24 VOLT DC POWER SUPPLIES (QS5.DNET)
 - (2) WEIDMULLER CIRCUIT BREAKERS (BR1D5UC)
 - (2) WEIDMULLER RED AND WHITE TERMINAL BLOCKS FOR INCOMING POWER (100-240 VAC 50-60HZ)
 - (1) 48 PORT PATCH PANEL (CPP48HDWBLY)
 - (1) 1RU BLANKING PANEL (DPFP1)RECOMMENDED TO IMPROVE THERMAL PERFORMANCE OF SWITCHES AND REDUCE UNINTENDED CONTACT WITH POWER SUPPLIES. IF NO SPACE IS AVAILABLE FOR THE BLANKING PANEL, MOVE THE PATCH PANEL DOWN 1RU TOWARD THE TIER.
 - (2) STRAIN RELIEF BARS (SRB19MDBL AND SRB19BLY) - (NOT SHOWN)
- POWER CIRCUIT DESIGNED FOR UP TO (2) 24 VOLT DC INDUSTRIAL ETHERNET SWITCHES NOT TO EXCEED 42 WATTS PER SWITCH
 - COMPLIES WITH UL508A, WHEN INSTALLED PER PANDUIT INSTRUCTIONS
 - CLASS 2 POWER CIRCUITS ARE PRE-WIRED, LABELED, AND TESTED.
 - WEIGHT: 9.45 lb [4.3 kg].

PART NUMBER

ZDINS24

TITLE

UNIVERSAL IDF, 100-240VAC IN, (2) 24VDC PS, HIGH DENSITY PATCH PANEL


CUSTOMER DRAWING

ITEM REVISION NAME

00157EDC/02

DATASET FILE NAME

00157EDC_DC/02B



THIRD ANGLE PROJECTION

MATERIAL

N/A

DRAWING NUMBER

00157EDC-DC

DRAWN BY

DATE

4/16/18

CHK

SCALE

NONE

SHEET 1 OF 2

SIZE

A

02B	6-1-26	TWV	USR 097950	USR 090895	ADDED WEIGHT	M09001CG/00
02A	2/7/22	JB0	MRWA	BETL	ADDED 1RU BLANKING PANEL ADDED DIM OF MAX AMOUNT OF SPACE FOR SWITCHES & MAX AIR GAP, SHEET 2	00157EDC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

