


Power Distribution Units

Empower your operations with cutting-edge PDU solutions. Streamline efficiency, safeguard assets, and unlock savings.

PANDUIT®

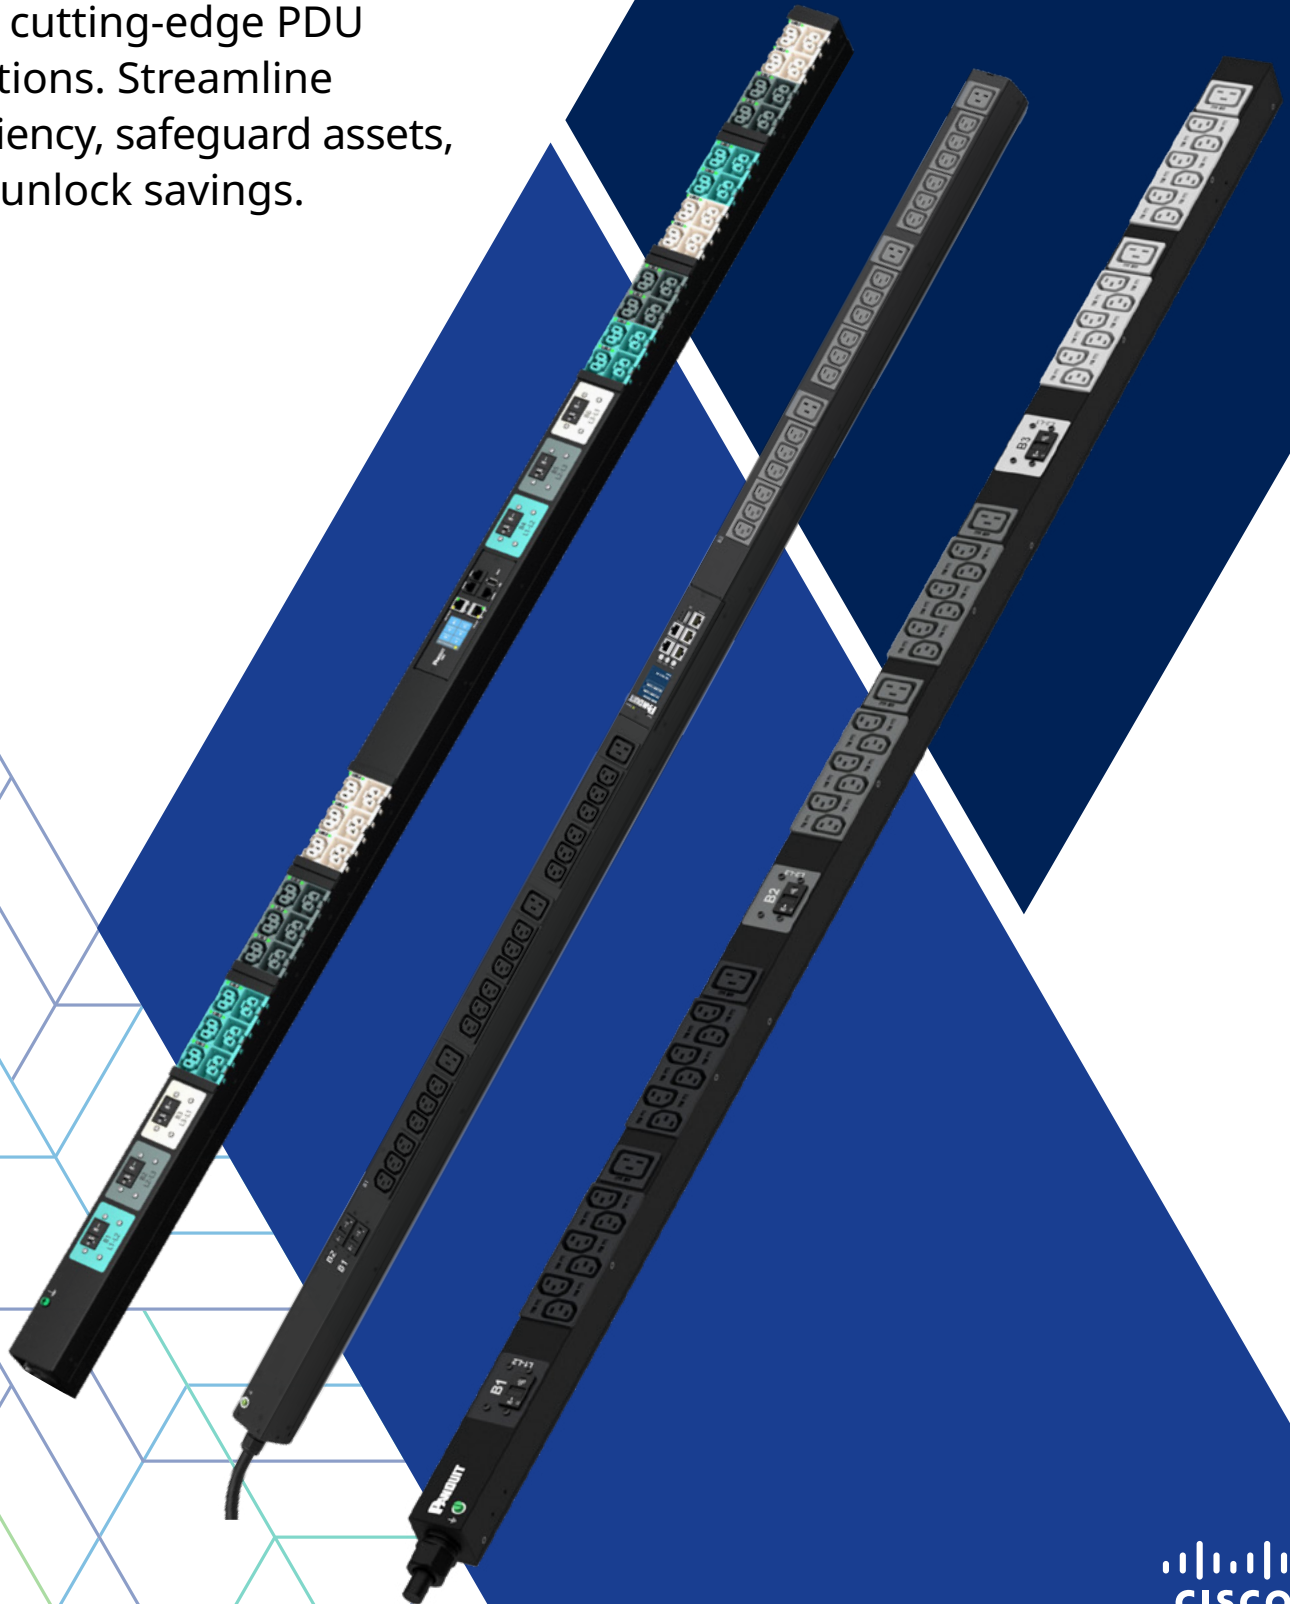


CISCO
Compatible

Welcome to Panduit® Power Distribution

In today's dynamic IT landscapes, efficiency and reliability aren't just goals — they're necessities. Our innovative PDU solutions, harmonized with Cisco Nexus platforms are engineered to elevate your operations, merging cutting-edge technology with uncompromised performance. Panduit PDUs stand as the cornerstone of power management, ensuring seamless operation of your equipment in data centers and high-density IT environments.

Value Proposition

**Quality & Reliability**


3-Year standard and 5-Year extended warranty.

**High Temperature**

Built with premium components to withstand 140°F (60°C) at full load.

**High Density Power**

Unique outlets design for high outlet density.

**Hot-Swappable & Upgradable**

Hot-Swappable Controller with large OLED display.

**Hardened Security**

Enhanced security with certificate-based advanced asymmetric encryption, validated and hardened with multiple security scanning tools.

**1 GB On Board Ethernet Connection**

Reduces deployment time and labor as PDU auto negotiates to 1GB network switches.

**Real-Time Monitor**

Real-time Monitoring of Power, Environmental & Cabinet Security.

**Plug & Play Accessories**

Variety Environmental & Cabinet Access Control Accessories.

**Multi-Device WebGUI**

Enhanced User-Experience with a self adjusting WebGUI that senses the device you are on.

**Multi-Color**

A variety of colored PDU chassis, power cords, and cable ties.

**Cisco Compatible**

Panduit's intelligent PDUs are compatible with Cisco Nexus Dashboard software to enhance its insights related to Energy Savings and Sustainability.

Power up your knowledge!

Scan the QR code to connect with our critical power specialist today and discover how we can supercharge your data center.



Table of Contents

PDU Applications	4	Monitored Per Outlet Series	13
Explore the versatility of PDUs across various industries, delivering reliable power where it's needed most.		Provides intricate power insights with dual-level monitoring at both the input and individual outlet, bringing unparalleled control over your energy distribution.	
Cisco Compatibility & Integration	5	Monitored Switched Per Outlet Series	14
Discover seamless integration with Cisco systems, enhancing network efficiency and power management.		Harmonizes comprehensive power monitoring at input and output levels with the strategic capability of individual outlet switching, epitomizing the pinnacle of integrated power management solutions.	
Critical Power Integrated Solutions	6	Universal Input Series	15
Dive into solutions that dive into solutions that keep your critical systems running without interruption thanks to robust and reliable power delivery.		Enhance the safety and efficiency of your infrastructure with our advanced sensors and security solutions.	
Series Features	7	Sensors & Security	16
Unveil the unique features of our PDU series, designed to meet the diverse needs of modern data centers.		Enhance the safety and efficiency of your infrastructure with our advanced sensors and security solutions.	
Which Panduit PDU is Right for You?	8	Power Cords	17
Review the key features and benefits of our various PDU devices.		Connect with confidence using our durable and reliable power cords, tailored for a variety of applications.	
Applications & Mounting	9	SiteCommand Utility Software	18
Gain installation insights to help prepare for installation day.		Elevate PDU management with our SiteCommand Utility software that is designed for efficiency and reliability.	
Basic Series	10	How to Select a PDU	19
Meet daily power distribution needs effortlessly, allowing devices to stay powered from UPS systems, generators, or direct mains supply.		Determine which PDU is right for you based on power capacity, input and output configurations, monitoring features and scalability needs.	
Metered Input Series	11	Product Part Numbers & Specifications	20
Specializes in precise input power monitoring, providing continuous surveillance and stability of your power service.		Find detailed specifications and part numbers to select the perfect PDU solutions for your specific requirements.	
Monitored Switched Series	12		
Merges meticulous input power monitoring with dynamic outlet switching, offering a robust solution for sophisticated power management			

PDU Applications & Sectors

Panduit Power Distribution Units are designed for the modern data center, integrating seamlessly with facility systems. Our PDUs offer versatile options in density, capacity, and connectivity, future-proofing your infrastructure to meet diverse application needs.

In the era of hybrid IT, our PDUs deliver reliable power across sectors like education, retail, healthcare, and finance. Our on-premise and colocation solutions enhance operational efficiency with a resilient architecture, future-proofing your operations for tomorrow's challenges.



Colocation Data Center

Offers multi-tenant data centers dual feeds, precise metering, and management, ensuring availability, billing accuracy, and space efficiency.



Education

Provides uninterrupted power to tech-enhanced classrooms and labs, supporting a seamless educational experience.



Financial

Secures transactional and operational continuity with robust power supply and real-time monitoring, fortifying trust and stability.



Healthcare

Delivers critical power reliability to protect medical records and data systems, underpinning patient care and data security.



Retail

Drives continuous operation of sales and digital systems, enhancing customer engagement and operational efficiency.




On-Prem Data Centers

Supplying a range of PDUs from basic to intelligent, tailored for the diverse and evolving needs of modern data centers.

Cisco Integration

Panduit's Intelligent Power Distribution Units (PDUs) seamlessly integrate with Cisco Nexus Dashboard software, elevating energy savings and sustainability insights to new heights. Through the innovative Panduit Data Collector, power data is effortlessly harvested from Panduit PDUs and relayed to the Nexus Dashboard via validated APIs, streamlining the management of both existing and new PDUs.


This integration empowers data center operators with unparalleled visibility — down to the site, equipment, or individual PDU outlet — providing actionable insights that drive energy efficiency, reduce operational costs, and enhance sustainability strategies. Discover the future of intelligent power management with Panduit, where advanced technology meets environmental stewardship.

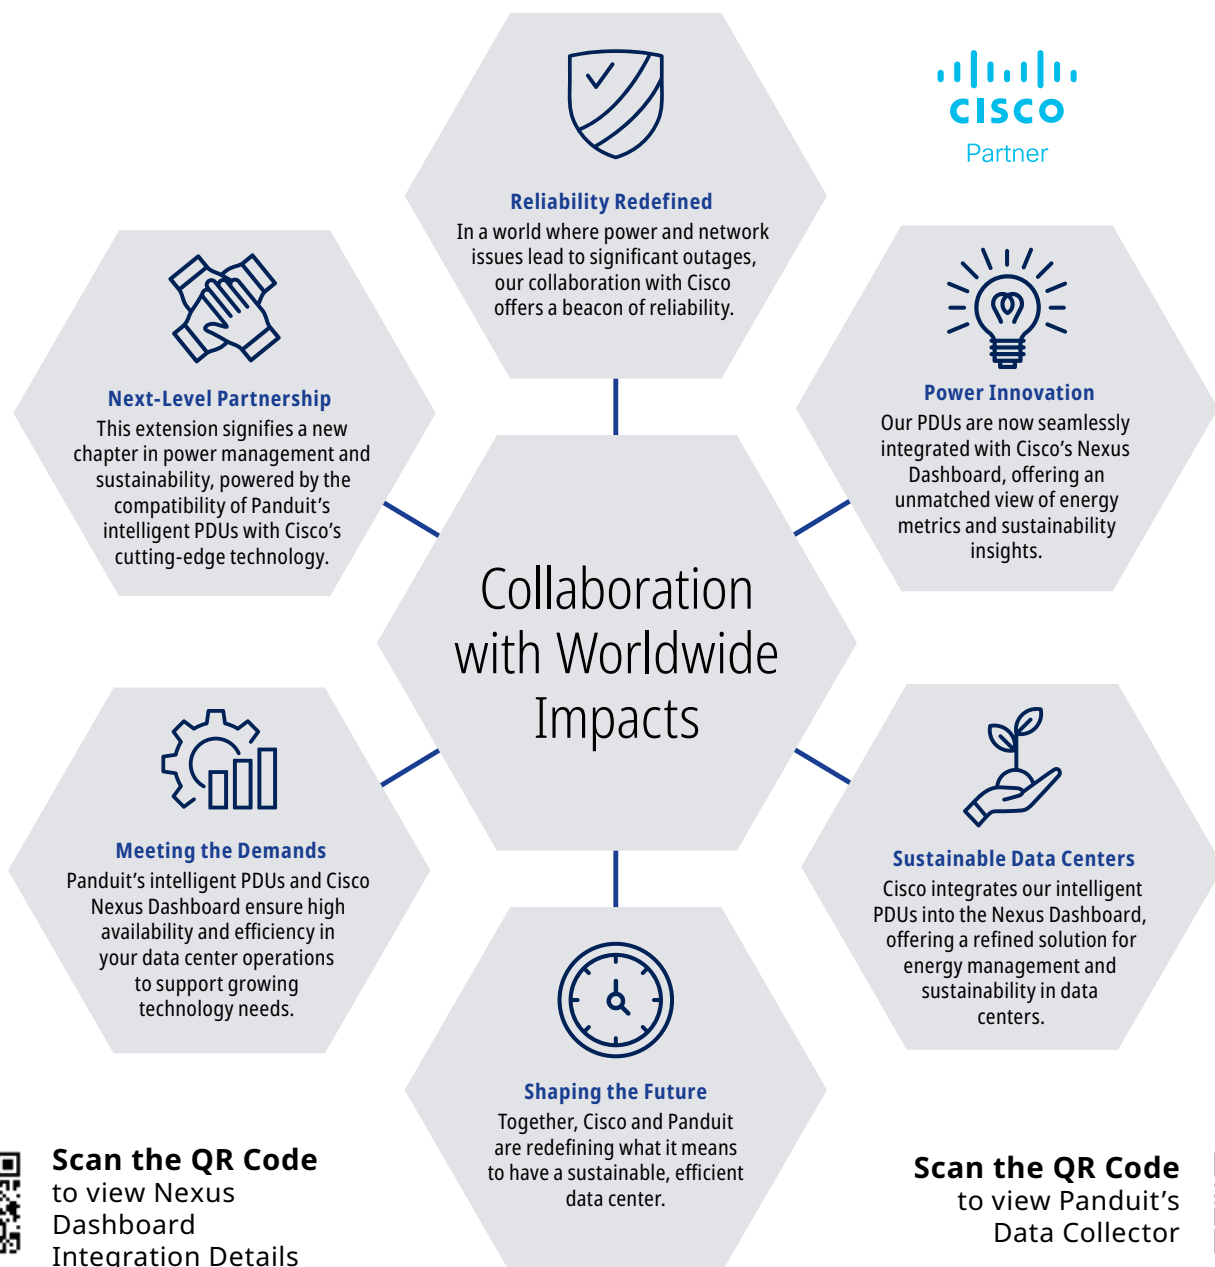

Panduit Integration

Panduit's integrated power management ecosystem is the intelligent core of your data center, with our PDU functioning as the pivotal connection point. This setup delivers a seamless interaction between the resilience of UPS systems, the comprehensive distribution capabilities of our PDUs, and the acute awareness brought in by intelligent environmental sensors and rack access control. Together, they form a cohesive network, all monitored under the vigilant eyes of third-party DCIM software.

This intelligent integration allows for precise power monitoring, proactive environmental adaptation, and fortified security, all within the robust framework of our 2- and 4-post racks and enclosures. It's this strategic alliance of technology that grants you sophisticated control over your data center operations, optimizing every aspect from performance to resource utilization, and ensuring that your critical power needs are not just met but anticipated and managed with precision.

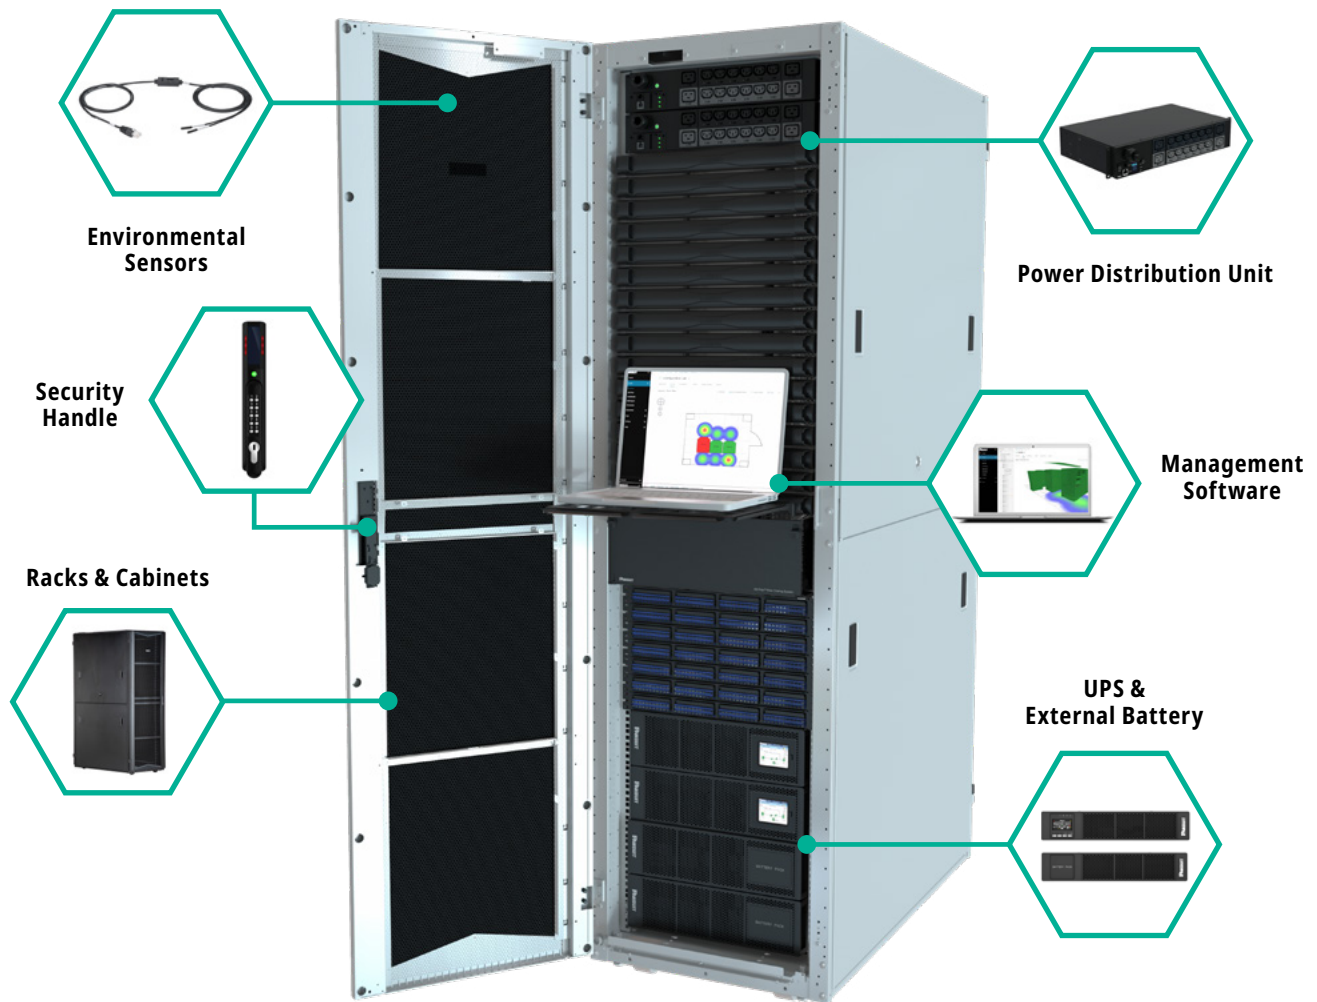

Scan the QR Code


to dive into our critical power solutions



PDU Series Features

Feature/Series	Basic PDU	MI Series	MS Series	MPO Series	MSPO Series
Non-Intelligent Power Distribution	✓	-	-	-	-
Intelligent Power Monitoring	-	✓	✓	✓	✓
Outlet Level Switching	-	-	✓	-	✓
Input Level Monitoring	-	✓	✓	✓	✓
Outlet Level Monitoring	-	-	-	✓	✓
Optimized Form Factor	✓	-	-	-	-
Environmental Monitoring	-	✓	✓	✓	✓
Security Handle Integration	-	✓	✓	✓	✓
High-Temperature Operation (60°C/140°F)	✓	✓	✓	✓	✓
Hot-Swappable Controller	-	✓	✓	✓	✓
Cloud Software Integration	-	✓	✓	✓	✓
4:1 Combination Outlets	-	✓	✓	-	✓

Key Features

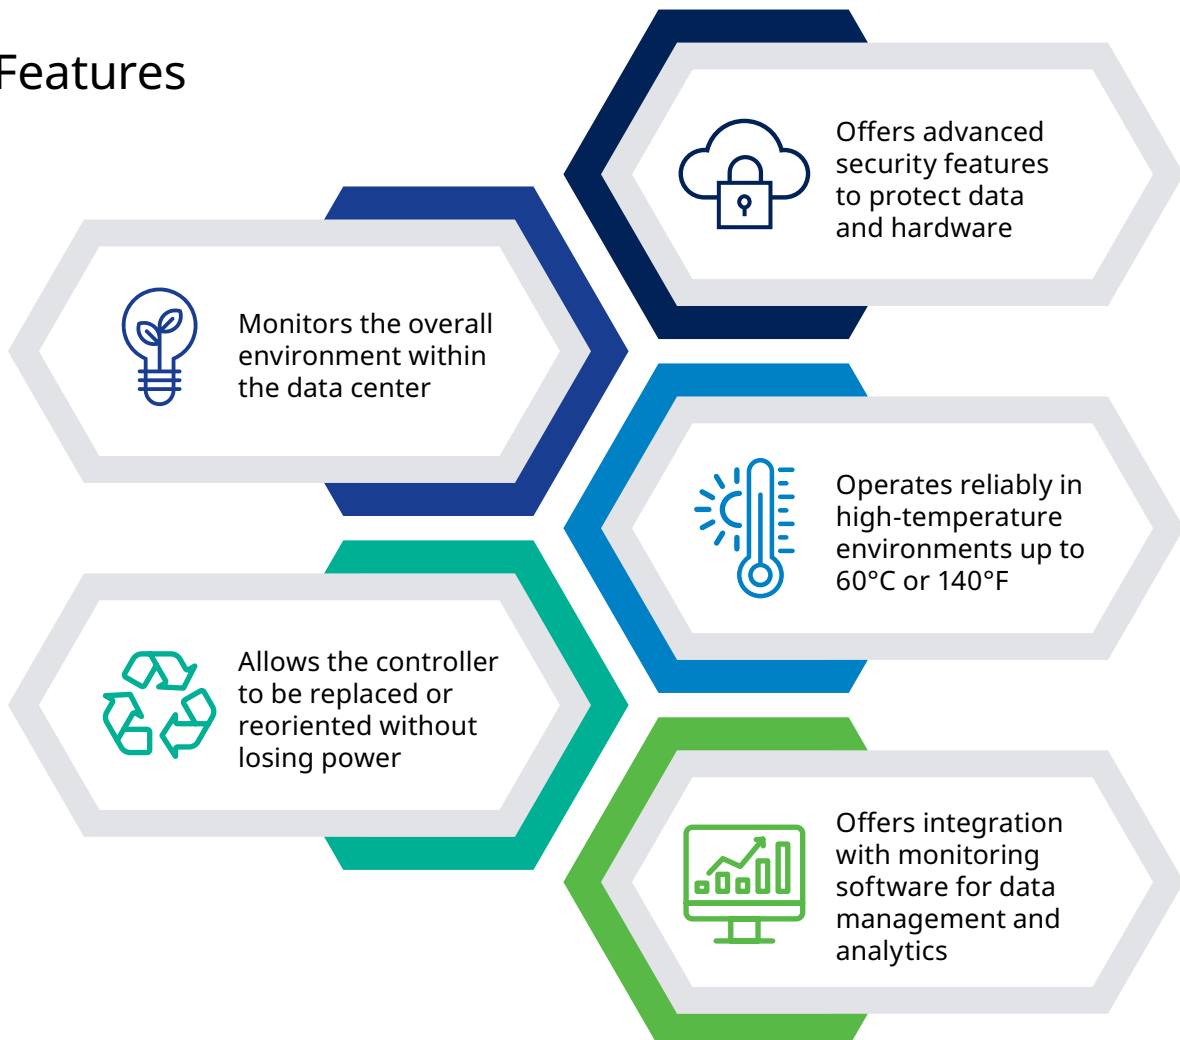

Which Panduit PDU is Right For You?

In today's dynamic IT landscapes, efficiency and reliability aren't just goals – they're necessities. Our dynamic line of PDU solutions are engineered to elevate your operations, merging cutting-edge technology with uncompromised performance. Which one best suits your needs? The comparison chart below highlights the key features and benefits of our ES2P, G6, and EL2P PDUs.



Identify your
ideal Panduit
PDU here




Feature and Benefit	ES2P	G6	EL2P
Target Market	Entry to Mid-tier, cost-sensitive	AI workloads, hyperscale, colocation	AI workloads, hyperscale, colocation
Price Position	Budget-Friendly	Premium Intelligent Solution	Premium Intelligent Solution
Basic	✓	–	–
Monitored Input	✓	✓	✓
Monitored Switched	✓	✓	✓
Monitored Per Outlet	✓	✓	✓
Monitored & Switched Per Outlet	✓	✓	✓
Network Connectivity (10/100/1000)	Single Gigabit Ethernet, Serial	Single Gigabit Ethernet, Serial	Dual 1Gb Ethernet, Serial
Wi-Fi, Bluetooth	–	–	Yes (via CNT06)
Daisy Chain (Max)	16	32	64
Mixed Daisy Chaining	–	–	✓
Secure Zero Touch Provisioning (sZTP)	–	–	✓
Controller Interface Display	LCD	OLED	LCD Auto-rotating touchscreen
Colored Display	–	–	✓
Hot-Swappable Controller	Yes, Manually Rotatable	Yes, Manually Rotatable	Yes, Auto-Rotatable
Security	SNMPv3, TLS, encrypted protocols	SNMPv3, TLS, encrypted protocols	UL-2900-1, IEEE 802.1X, IEC 62443-4-2, USGv6, Secure Code Signing
DCIM Integration	–	–	Native Cisco Nexus Dashboard + Redfish API
Advanced DCIM Integration	–	–	✓
SiteCommand Compatibility	–	–	✓
Rack Access Control	–	✓	✓
Environmental Monitoring	✓	✓	✓
Outlet Type	C13/C19/NEMA 5-20R	C13/C19/NEMA 5-20R	Combination Outlets C13/C15/C19/C21, NEMA 5-20R
Outlet Switching	–	✓	MS/MSPO
Outlet Metering	✓	✓	✓
Metering Accuracy	± 2%	± 2%	± 0.5%
Swivel Cord	–	–	✓
Toolless Mounting (Vertical PDUs)	✓	✓	✓
Housing Material	Anodized Aluminum/ Powder Coated Steel	Powder Coated Steel	Powder Coated Steel
Operating Temperature (Max)	55°C	60°C	60°C
Warranty	3 Standard + 2 Year Extended	3 Standard + 2 Year Extended	5 Standard + 1 Year Extended
TAA Compliant (North America)	✓	–	✓

Applications & Mounting



Chassis and Plug Location

180-Degree symmetric vertical chassis with end-exiting cable simplifies the supply chain by enabling a single part number for both overhead and under floor power.

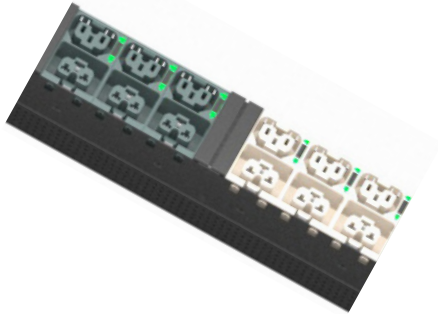


Combination Outlets

Provide ultimate flexibility, allowing each outlet to be used as a C21, C19, C15, or C13, catering to various application needs.



Universal Inlet

Future-proof your infrastructure with a single PDU that can be deployed globally by simply swapping in the appropriate facility type cord for your region, allowing power scaling from 5kW to 27.6kW.

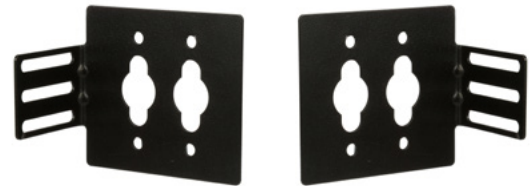

Tool-less Mounting

Effortlessly mount your PDU into a rack with tool-less installation using a convenient button slot, saving time and simplifying setup.



Hot-Swappable Controllers

Allow complete removal of the network interface module without affecting outlet status, making them ideal for service or repair.



Rotatable Controllers

Enables a single part number to be used for both overhead and underfloor power management.

Basic PDU

Our Basic PDUs offer optimized horizontal/vertical form factors, minimizing space in a rack/cabinet while maintaining outlet count. They deliver our renowned quality and reliability without the extra cost of network intelligence or outlet control. In the “last mile” of the data center power chain, only the best will do.

Enhanced Circuit Protection

- Equipped with built-in magnetic hydraulic circuit breakers
- Provides robust defense against short circuits and overloads
- Not susceptible to high operating temperature environments
- Guarantees safe, uninterrupted operation
- Single and three phase power

Reliable Power Outlet Connectivity

- Locking power cord compatible
- Cable tie slots for enhanced cord retention (on select models)
- High quality components

Robust Construction

- Constructed with a durable metal housing and premium components
- Built to last, ensuring increased longevity and reliability
- Designed to perform even in demanding high-temperature environments

Versatile Mounting Options

- Mounting buttons, brackets and hardware is included
- Vertical models feature threaded inserts on 3 sides to enable either back or side mounting
- Horizontal models are EIA-310 compliant

Heavy-Duty Power Input

- Durable, NRTL-approved input cords and plugs ensure longevity even in the harshest environments.
- The power cord exits through the end cap, enabling a single part number to be used for both overhead and underfloor power configurations.
- Models 20A and below feature C20 inlet with a detachable input cord

Simplified Installation

- Tool-less mounting buttons enable quick and secure setup of vertical PDUs
- Facilitates effortless attachment to PDU mounting bracket keyhole slots

Comprehensive Offering

- Models offering up to 54 outlets and 22kW
- Designed for versatile rack integration
- Accommodates any data center layout



**ES2P PDU
E12B47M**

Characteristics of Power Distribution Units



Non-Intelligent
PDU



Optimized
Form Factor



High-Temp
Operations

Metered Input

Metered Input PDUs add network intelligence to measure power consumption, energy use, and circuit breaker amperage. Pair with sensors and electronic handles for access control and environmental sensing.

Comprehensive Monitoring

- Advanced monitoring capabilities deliver precise, reliable power distribution
- Essential for mitigating disruptions and upholding seamless operations
- SNMP compatibility sends power data to your BMS/DCIM
- Built-in alerts and user-defined thresholds notify you of abnormalities before they become critical

Outlet Configuration

- Features a strategic mix of C13 and C19 outlets
- Models like the P42D20M adapt to diverse equipment needs
- Offers unparalleled device compatibility and configuration flexibility

High Capacity

- Tailored for intense power requirements
- PDUs like the P42D21M model excel in high-power demand settings
- Provides robust support for numerous devices
- 12 circuit breakers, 60/63 amp, 415 V, three-phase 34.6kW (North America) and 43.6kW (EMEA) power capacity

Environmental Monitoring

- Extend vigilance to environmental conditions
- Proactively protect IT assets from environmental threats
- Provides insights for optimal operational efficiency

Security and Safety Features

- Enhance data center integrity with physical access monitoring
- Significantly reinforce cabinet security
- Safeguard critical systems and data

Vertical and Tool-less Mounting

- Tool-less mounting buttons enable quick and secure setup of vertical PDUs
- Facilitates effortless attachment to rack keyhole slots



**ES2P PDU
E42D06M**

Characteristics of Power Distribution Units



High-Temp
Operations



Input Level
Monitoring



Cisco
Compatible

Monitored Switched

When users require advanced management and control, Switched PDUs set the standard in IT environments. Building on the intelligence of the Metered Input family, Switched PDUs offer outlet control (on/off/power cycle). For distributed sites and lights-out environments, they are indispensable.

Advanced Monitoring

- Provide comprehensive input power monitoring
- Obtain precise outlet control
- Include power cycling capabilities
- Deliver superior power distribution oversight

Capacity Planning and Optimization

- Provide intricate data for meticulous capacity planning
- Support power resource optimization
- Obtain efficient and cost-effective power infrastructure management

Enhanced Security and Uptime

- Secures data center infrastructure with remote power control
- Grants outlet control to authorized personnel only
- Allows for swift incident response
- Streamlines power management

Integration with DCIM Solutions

- Designed for integration with DCIM solutions
- Provide a holistic view of the data center's power, space, and environment
- Enhance management efficiency

Environmental Monitoring

- Extend vigilance to environmental conditions
- Proactively protect IT assets from environmental threats
- Operate at optimal efficiency



**EL2P
E42E24L**

Characteristics of Power Distribution Units



Cisco
Compatible



Outlet Level
Switching



High-Temp
Operations



Input Level
Monitoring

Monitored Per Outlet

Monitored per Outlet PDUs offer precise power monitoring at the outlet level, ensuring optimal power distribution for data centers. This series enhances energy management, operational efficiency, and reliability in demanding environments.

Detailed Power Monitoring

- Maximize energy efficiency with Detailed Power Monitoring
- Enable meticulous tracking of power consumption at each outlet
- Optimize energy management
- Reduce costs with unparalleled precision

Environmental Monitoring


- Maintain the perfect environment for IT equipment with environmental monitoring
- Monitor critical environmental factors
- Confirms hardware operates within optimal conditions

Load Monitoring

- Achieve perfect load distribution with load monitoring
- Keep power loads balanced and efficient
- Prevent overloads
- Maximize operational performance

Alarm Thresholds

- Stay ahead of potential issues with customizable alarm thresholds
- Receive immediate notifications for any irregularities
- Allow for swift action to maintain continuity



E36F13L

Characteristics of Power Distribution Units



Intelligent Power
Monitoring



Cisco
Compatible



High-Temp
Operations



Input Level
Monitoring

Monitored Switched Per Outlet

Monitored & Switched per Outlet PDU series offer granular power monitoring and remote outlet switching. Enhance operational safety and optimize power usage with environmental monitoring, perfect for data centers prioritizing efficiency, security, and detailed power management.

Granular Control and Monitoring

- Dive deep into power management with granular control and monitoring
- Offer detailed insights and remote control over each outlet
- Elevate troubleshooting and power management strategies
- Achieve new heights of precision and convenience

Environmental Sensing

- Allows IT equipment to thrive under ideal conditions with environmental sensing capabilities
- Monitor temperature and humidity
- Safeguard technology from environmental threats
- Optimize performance and longevity

Efficient Energy Management

- Provide critical insights into power consumption
- Empower cost-effective, sustainable decisions
- Optimize power distribution needs

Integration with DCIM

- Achieve a holistic view of your data center's power and environmental health
- Seamless integration with DCIM systems
- Enhance operational insights
- Merge power management with comprehensive infrastructure oversight



EL2P PDU
E42G20L

Characteristics of Power Distribution Units



Intelligent Power Monitoring



Outlet Level Switching



High-Temp Operations



Input Level Monitoring



Outlet Level Monitoring



Cisco Compatible

Universal

The universal PDU offers modularity and scalability with changeable input cords for global compatibility. Its 4:1 outlets (C13/C15/C19/C21) accommodate various cords, making it adaptable for multiple input and output configurations, aiming for a truly “universal” PDU.

Global Versatility

- Universal inlet design
- Broad voltage compatibility
- Redefine power distribution
- Simplify global deployments
- Reduce inventory challenges

Scalable Power

- Panduit's uPDU supports power requirements from 3.3kW to 27.6kW
- Offers flexibility to adapt to changing power needs
- Simply swap out the input cord
- No need to replace the entire PDU due to increased power requirements

Environmental Sensing

- Built-in sensors for real-time monitoring
- Safeguard critical infrastructure from environmental risks
- Maintain optimal operational conditions

Energy Management

- Offers advanced analytics on energy consumption, promoting cost savings and sustainability by optimizing energy use

DCIM Integration

- Enables seamless integration with DCIM systems
- Provides comprehensive insights into power and environmental conditions
- Supports strategic decision making



**G5 PDU
P36E50M**

Characteristics of Power Distribution Units



Outlet Level
Switching



High-Temp
Operations



Input Level
Monitoring



Cisco
Compatible

Panduit Integration

Panduit Environmental Sensors and Smart Rack Handles paired with a Panduit iPDU and UPS provide real-time monitoring and advanced physical security to ensure your operations run smoothly and securely.

Environmental Sensors


Features

- Real-time temperature, humidity, and leak detection
- Customizable alerts and thresholds
- Easy integration with DCIM software
- Panduit iPDU and UPS firmware self-identification
- Quick connect with RJ45 plug

Smart Rack Handle

Features

- Up to 200 users
- Multifrequency card access
- HID 125 kHz/13.5 MHz, Mifare and iClass
- Dual authentication (keypad version)

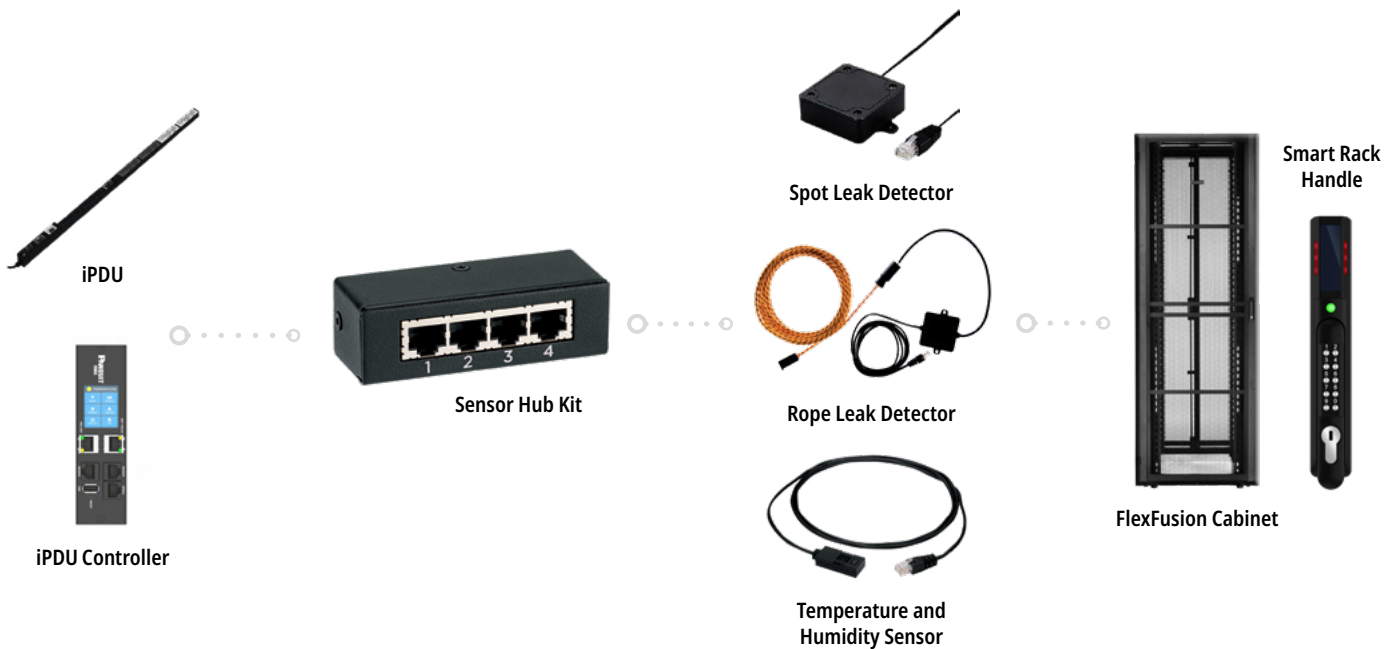


Discover how our environmental sensors and rack security solutions can transform your data center operations.

► **Environmental & Security Solutions**

Dual-Locking IT Power Cords

Our dual-locking IT power cords are designed to reliably transfer power from the rack PDU to active IT equipment in the data center cabinet or rack. Recognized for their best-in-class, heavy-duty, dual-locking configuration, dual-locking IT power cords establish a secure and stable power supply. These cords are meticulously crafted to minimize management of slack loops and unnecessary clutter, effectively optimizing the organization of your IT racks.

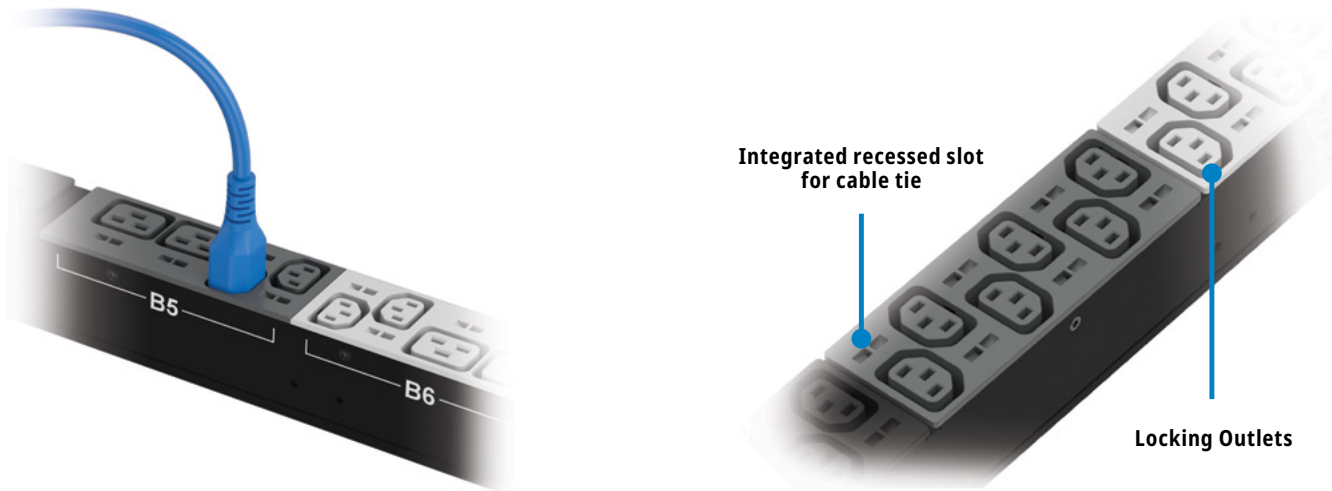

LPCB02-X



LPCB07-X



LPCB12-X



PLD04BL



PLD04RD



PLD04BU

Scan the QR Code

to view the Power Cords Selector Guide



SiteCommand Utility Software

Elevate PDU Management


Experience seamless management of our iPDU* with Panduit SiteCommand Utility software. Designed for efficiency, this utility tool enables bulk configuration and firmware updates, helping power infrastructures operate at peak performance. This comprehensive software simplifies PDU management, and enhances reliability, making it an essential asset for any organization.

Use Case Scenarios

- **Data Center Operations:** Simplify iPDU onboarding and operation with bulk configuration
- **Edge Sites:** Centrally manage devices across multiple locations
- **Enterprise Networks:** Quick deploy security patches through firmware updates

Benefits

- **Reduced Risk:** Keeps system up-to-date
- **Efficiency Gains:** Streamline configuration processes
- **Enhanced Performance:** Allows for optimal system performance

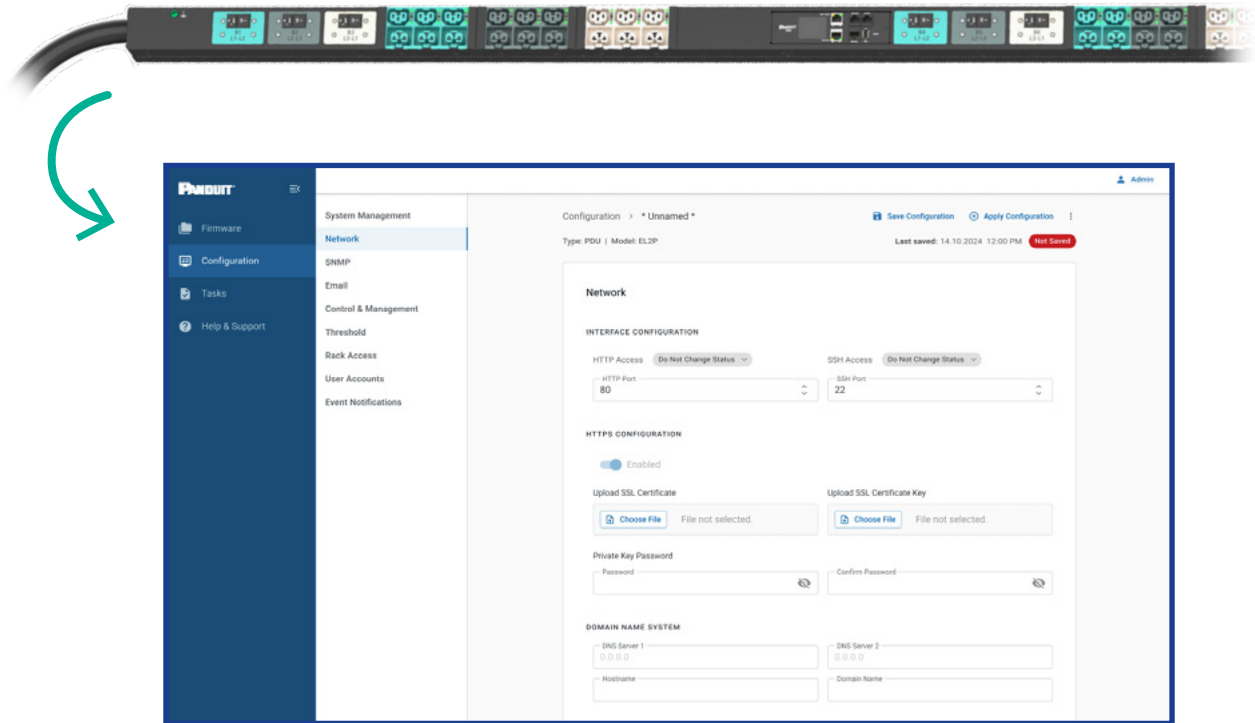

▶ **Review Our Online Resource Center Here**

*compatible with ES2P & EL2P series only.

How to Select a PDU

1

Input Plug Type Compatibility

Select an input plug type that is compatible with your facility to ensure that you are able to power on the device once the part arrives.

2

Choose a Form-Factor

Determine whether a vertical (0U) or horizontal (1U or 2U) form factor best fits your space requirements and installation preferences.

3

Verify Compatibility

Match the PDUs input voltage, phase, and current specifications with the power feed of your UPS or facility connection and the requirements of the connected devices.

4


Determine Outlet Receptacle Types

Identify the types (e.g., IEC C13, IEC C19, NEMA 5-15R) and quantities of outlet receptacles needed to power your connected equipment effectively.

5

Remote Access/Control Requirements

Assess the need for remote access or control features. Choose from options like basic (non-intelligent) PDU, network metered PDU (providing power data monitoring at the PDU inlet), or network switched PDU (offering remote power-cycle capabilities of outlets) based on your requirements for power backup, monitoring, and control.

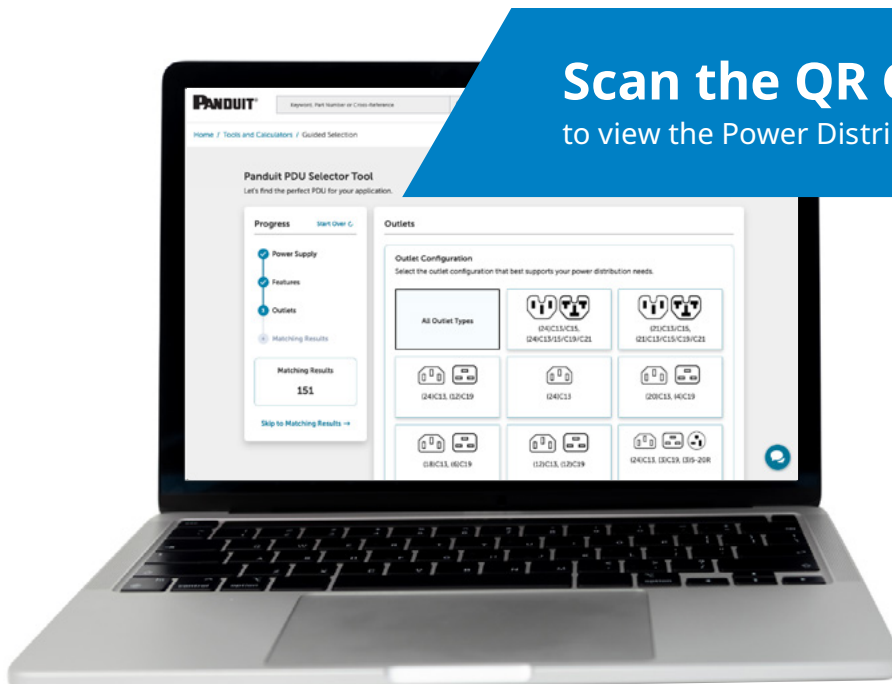

Scan the QR Code

to view the Power Distribution Selector Guide



Product Part Numbers & Specifications


Panduit SKU Part No.	PDU Series	Region	Form Factor	Input Phase	Apparent Power (kVA)	Input Current (A) per phase	Outlet Count	# of CB's	Input Plug Type	Outlet Type
BASIC PDU										
E12B01M	ES2P	EMEA/AP	1U	3.7	1	16	12	0	IEC C20 INLET	(12) C13
E12B19M		NA/LATAM		1.9		20/16			NEMA 5-20P 3W	(12) 5-20R
E30B06M		EMEA/AP	0U MID	7.4		32	30	2	IEC 60309 2P+E 6h 32A (IP44)	(24) C13, (6) C19
MONITORED INPUT PDU										
E42D20L	EL2P	NA	0U FULL	17.3	3	60	42	6	IEC 60309 3P+E 9h 60A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21
E42D22L				14.4		50			CS8365	
E48D31L		NA/EMEA	0U WIDE	34.6/43.5	1	60/63	48	12	IEC 60309 3P+N+E 6h 60A/63A (IP44)	(24)C13/C15, (24)C13/C15/ C19/C21
E36D25L		NA	0U FULL	5		30	36	2	NEMA L6-30P	(18)C13/C15, (18)C13/C15/ C19/C21
E42D06L		EMEA		7.4		32	42	3	IEC 60309 2P+E 6h 32A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21
E36D06L							36	2	IEC 60309 2P+E 6h 32A (IP44)	(18)C13/C15, (18)C13/C15/ C19/C21
E48D22L		NA		8.6	3	30	48	3	NEMA L15-30P	(24)C13/C15, (24)C13/C15/ C19/C21
E42D42L		EMEA		11		16	42	0	IEC 60309 3P+N+E 6h 16A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21
E48D21L		NA		8.6		30	48	3	NEMA L21-30P	(24)C13/C15, (24)C13/C15/ C19/C21
E36D28L							36			(18)C13/C15, (18)C13/C15/ C19/C21
E48D20L		NA/EMEA		17.3/22.0		30/32	48	6	IEC 60309 3P+N+E 6h 30A/32A (IP44)	(24)C13/C15, (24)C13/C15/ C19/C21
E42D07L		NA		17.3		30	42		NEMA L22-30P	(21)C13/C15, (21)C13/C15/ C19/C21
E48D23L		NA/EMEA		11.5/11.0		20/16	48	0	IEC 60309 3P+N+E 6h 20A/16A (IP44)	(24)C13/C15, (24)C13/C15/ C19/C21
E42D04L		EMEA		22		32	42	6	IEC 60309 3P+N+E 6h 32A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21

Product Part Numbers & Specifications (continued)

Panduit SKU Part No.	PDU Series	Region	Form Factor	Input Phase	Apparent Power (kVA)	Input Current (A) per phase	Outlet Count	# of CB's	Input Plug Type	Outlet Type	
MONITORED INPUT PDU (CONTINUED)											
E08D10M	ES2P	NA/LATAM	1U	1.9	1	20	8	0	NEMA 5-20P 3W	(8)5-20R	
E12D13M				3.3			12		NEMA L6-20P 3W	(12) C13	
E16D14M				5		30	16	2	NEMA L6-30P 3W	(12) C13, (4) C19	
E36D29M		0U FULL	10	3	50	36	3	CS8365 50A 4W	(30) C13, (6) C19		
E38D28M			8.6		30	38		NEMA L21-30P 5W	(30)C13, (6) C19, (2)5-20R		
E42D06M			EMEA/AP	7.4	1	32	42	2	IEC 60309 2P+E 6h 32A (IP44)	(36) C13, (6) C19	
E24D03M		24					(20) C13, (4) C19				
E30D05M		0U MID		11	3	16	30	0	IEC 60309 3P+N+E 6h 16A (IP44)	(24) C13, (6) C19	
E36D01M			0U FULL	22		32	36	6	IEC 60309 3P+N+E 6h 32A (IP44)	(24) C13, (12) C19	
MONITORED SWITCH PDU											
E42E24L	EL2P	NA	0U FULL	17.3	3	60	42	6	IEC 60309 3P+E 9h 60A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21	
E42E26L				14.4		50			CS8365	(21)C13/C15, (21)C13/C15/ C19/C21	
E48E25L		NA/EMEA	0U WIDE	34.6/43.5	3	60/63	48	12	IEC 60309 3P+N+E 6h 60A/63A (IP44)	(24)C13/C15, (24)C13/C15/ C19/C21	
E42E07L		EMEA	0U FULL	7.4		1	32	42	3	IEC 60309 2P+E 6h 32A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21
E48E22L		NA		8.6		30	48	6		NEMA L15-30P	(24)C13/C15, (24)C13/C15/ C19/C21
E48E21L										NEMA L21-30P	
E48E20L		NA/EMEA		0U FULL		17.3/22.0	3	30/32	48	6	IEC 60309 3P+N+E 6h 30A/32A (IP44)
E48E23L			11.5/11.0			20/16		0		IEC 60309 3P+N+E 6h 20A/16A (IP44)	
E36E09L		EMEA	0U FULL	22		3	32	36	6	IEC 60309 3P+N+E 6h 32A (IP44)	(18)C13/C15, (18)C13/C15/ C19/C21
E36F13L										IEC 60309 3P+N+E 6h 32A (IP44)	

Product Part Numbers & Specifications (continued)

Panduit SKU Part No.	PDU Series	Region	Form Factor	Input Phase	Apparent Power (kVA)	Input Current (A) per phase	Outlet Count	# of CB's	Input Plug Type	Outlet Type		
MONITORED AND SWITCHED PER OUTLET PDU												
E42G20L	EL2P	NA	OU FULL	17.3	3	60	42	6	IEC 60309 3P+E 9h 60A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21		
E42G22L				14.4		50			CS8365			
E42G02L				10	1	60			IEC 60309 2P+E 6h 60A (IP44)			
E42G05L		NA/EMEA		17.3/22.0	3	30/32	42	3	IEC 60309 3P+N+E 6h 30A/32A (IP44)			
E42G06L				11.5/11.0		20/16			IEC 60309 3P+N+E 6h 20A/16A (IP44)			
E36G31L		NA		17.3	1	60	36	6	IEC 60309 3P+E 9h 60A (IP44)	(18)C13/C15, (18)C13/C15/ C19/C21		
E36G30L				14.4		50			CS8365			
E42G03L		NA/EMEA		5.0/7.4	1	30/32	42	3	IEC 60309 2P+E 6h 30A/32A (IP44)	(21)C13/C15, (21)C13/C15/ C19/C21		
E36G18L		NA		5		30	36	2	NEMA L6-30P	(18)C13/C15, (18)C13/C15/ C19/C21		
E48G01L		NA/EMEA	OU WIDE	34.6/43.5	3	60/63	48	12	IEC 60309 3P+N+E 6h 60A/63A (IP44)	(24)C13/C15, (24)C13/C15/ C19/C21		
E42G04L		NA	OU FULL	8.6		30	42	3	NEMA L15-30P	(21)C13/C15, (21)C13/C15/ C19/C21		
E48G32L							48		NEMA L21-30P	(24)C13/C15, (24)C13/C15/ C19/C21		
E48G31L							36		(18)C13/C15, (18)C13/C15/ C19/C21			
E36G20L				10		50	3	CS8365	(18)C13/C15, (18)C13/C15/ C19/C21			
E36G19L				8.6		30		NEMA L21-30P	(18)C13/C15, (18)C13/C15/ C19/C21			
E48G04L				17.3		48	6	NEMA L22-30P	(24)C13/C15, (24)C13/C15/ C19/C21			
E36G33L		NA/EMEA		17.3/22.0		30/32		36	IEC 60309 3P+N+E 6h 30A/32A (IP44)	(18)C13/C15, (18)C13/C15/ C19/C21		
E48G30L								48		(24)C13/C15, (24)C13/C15/ C19/C21		
E36G32L		NA/EMEA		11.5/11.0		20/16	36	3	IEC 60309 3P+N+E 6h 20A/16A (IP44)	(18)C13/C15, (18)C13/C15/ C19/C21		
E48G33L							48	0		(24)C13/C15, (24)C13/C15/ C19/C21		

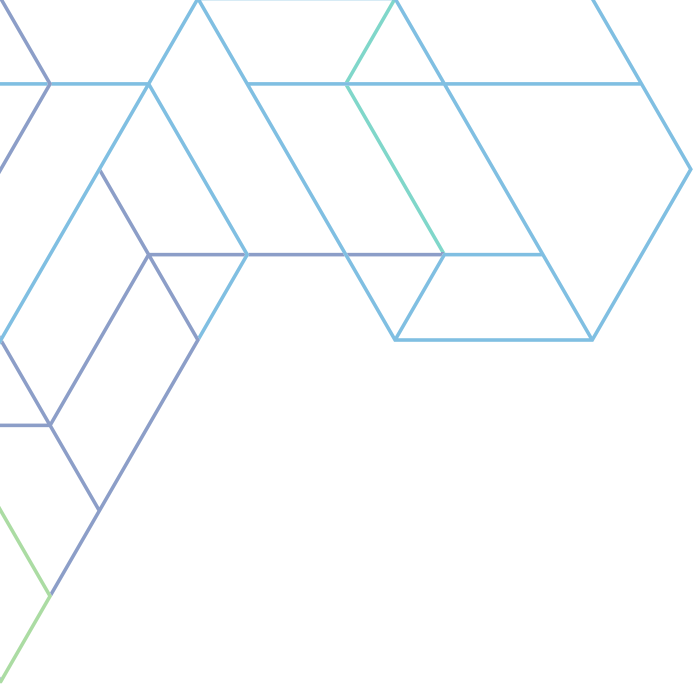

We have the knowledge
and experience to help you
make the most of your
infrastructure investment.

panduit.com/pdu



Let's connect

panduit.com/contact-us

PANDUIT®

infrastructure for a connected world