



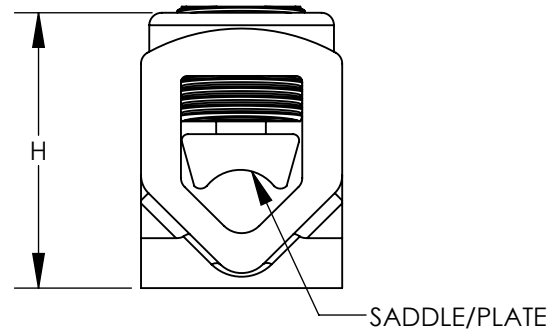

NOTES:

1. UL LISTED
2. MATERIAL: CAST COPPER
3. FOR COPPER WIRE ONLY
4. SADDLE/PLATE PROVIDES UNIFORM CLAMPING FORCE WITHOUT DISTORTING CABLE SHAPE.

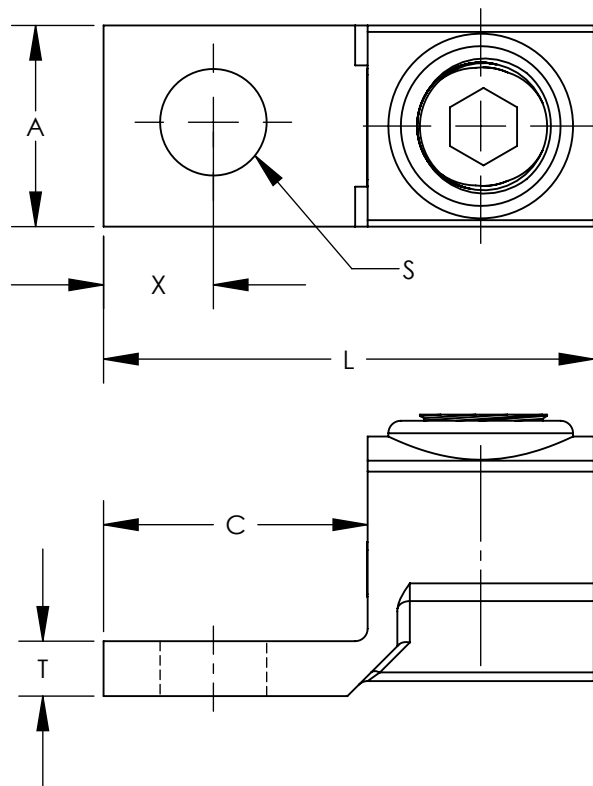

CATALOG NUMBER	CONDUCTOR RANGE	NAVY CABLE SIZE	APPROXIMATE DIMENSIONS - +/- .03							WRENCH SIZE	TORQUE VALUE IN-LBS
			A	C	S	H	L	X	T		
HL8-1-X	4 SOLID - 1 STR.	50-75	0.69	0.69	0.28	0.89	1.63	0.34	0.22	7/16	100
HL13-1-5	1 STR - 2/0 STR	100-125	0.81	0.88	0.44	1.05	1.88	0.44	0.22	9/16	250
HL21-1-5	2/0 STR - 4/0 STR	150-200	1.00	1.00	0.44	1.31	2.19	0.50	0.25	9/16	250
HL30-1-2	4/0 STR - 300kcmil	250-300	1.06	1.25	0.56	1.44	2.50	0.63	0.31	5/8	350
HL50-1-2	300kcmil - 500kcmil	400-500	1.38	1.38	0.56	1.63	2.94	0.69	0.34	3/8	480

08	7/12	JHNU	JHNU	REVISED WRENCH SIZE FOR HL50-1-2: 3/8 WAS 3/4	N41181BC-C41181	RGB	RGB
07	4/12	JHNU	JHNU	REVISED DIM'S FOR HL8-1: .69 WAS .75, .89 WAS .9, 1.63 WAS 1.56 REVISED DIM'S FOR HL13-1: .44 WAS .41, 1.05 WAS 1.14 REVISED DIM'S FOR HL30-1: 1.44 WAS 1.47 REVISED DIM'S FOR HL50-1: 1.38 WAS 1.50, 1.63 WAS 1.65, 2.94 WAS 3.00, .69 WAS .75 ADDED +/- .03 TOLERANCE	N41181BC-C41181	RGB	RGB
06	7/08	JHNU	JHNU	REMOVED HL1-25-X & HL4-1-X; MOVED TO DWG C41758 CONVERTED DRAWING TO SOLIDWORKS			
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP

PANDUIT CORP. TINLEY PARK, ILLINOIS		ONE BOLT HOLE PREMIUM CONNECTOR TYPE HL (HL8-1-X, HL13-1-5, HL21-1-5, HL30-1-2, HL50-1-2)	
		CUSTOMER DRAWING	
SCALE N/A		DRAWING NO / CAD FILE C41181_08	