

NYGLOBAL_BSIZE

A



B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

2



1



PANDUIT PART No.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs. (g) / 100 pcs
	MIN. in. (mm)	MAX. in. (mm)										
PLT1M-*360	.06 (1.6)	.87 (22)	.043 (1.1)	.089 (2.5)	.169 (4.3)	.154 (3.9)	.180 (4.6)	3.9 (99)	12 (53)	MINIATURE	CURVED	.07 (32)
PLT1.5I-*360	.06 (1.6)	1.38 (35)	.045 (1.1)	.142 (3.6)	.206 (5.2)	.180 (4.6)	.240 (6.1)	5.6 (142)	26 (116)	INTERMEDIATE	CURVED	.14 (64)
PLT2S-*360	.06 (1.6)	1.88 (47.8)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.316 (8.0)	7.4 (188)	35 (156)	STANDARD	CURVED	.29 (132)
PLT3S-*360	.06 (1.6)	3.00 (76)	.052 (1.3)	.190 (4.8)	.262 (6.7)	.220 (5.6)	.337 (8.6)	11.5 (292)	35 (156)	STANDARD	CURVED	.45 (204)
PLT4S-*360	.06 (1.6)	4.00 (102)	.052 (1.3)	.190 (4.8)	.265 (6.7)	.220 (5.6)	.337 (8.6)	14.5 (368)	35 (156)	STANDARD	CURVED	.56 (254)
PLT4H-*360/147	.188 (4.8)	4.11 (104.5)	.060 (1.5)	.300 (7.6)	.338 (8.6)	.290 (7.4)	.480 (12.2)	14.5 (368)	75 (334)	LIGHT HEAVY	STRAIGHT	1.03 (468)
PLT4H-*360	.188 (4.8)	4.00 (102)	.075 (1.9)	.300 (7.6)	.338 (8.6)	.290 (7.4)	.480 (12.2)	14.5 (368)	75 (334)	LIGHT HEAVY	STRAIGHT	1.28 (581)
PLT7LH-*360	.188 (4.8)	7.00 (178)	.075 (1.9)	.300 (7.6)	.350 (8.8)	.330 (8.4)	.480 (12.2)	24.7 (627)	75 (334)	LIGHT HEAVY	STRAIGHT	2.09 (950)
PLT5EH-C360	.50 (12.7)	5.0 (127.0)	.075 (1.9)	.50 (12.7)	.66 (16.8)	.40 (10.2)	0.78 (19.8)	20.1 (511)	200 (890)	EXTRA HEAVY	STRAIGHT	3.1 (1406)
PRT5EH-C360	.50 (12.7)	5.0 (127.0)	.075 (1.9)	.50 (12.7)	.66 (16.8)	.40 (10.2)	0.78 (19.8)	22.2 (564)	200 (890)	EXTRA HEAVY	STRAIGHT	3.1 (1406)
PLB4H-TL360	**3.6 (91)		.075 (1.9)	.300 (7.6)	.974 (24.74)	.322 (8.18)	.490 (12.45)	14.4 (366)	100 (445)	LIGHT HEAVY	STRAIGHT	1.45 (660)
PLWS4EH-TL360	0.38 (9.5)	4.13 (105)	.055 (1.4)	.50 (12.7)	.385 (9.8)	.316 (8.04)	.78 (19.8)	15.1 (384)	100 (445)	EXTRA HEAVY	CURVED	1.6 (726)

NOTES:

1) SEE panduit.com FOR NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE

2) **MAX. COMBINED BUNDLE DIA.

								TITLE									
								Post Industrial Recycled (PIR) Cable Ties									
								CUSTOMER DRAWING									
								ITEM REVISION NAME				01234NBB/01		PANDUIT			
								DATASET FILE NAME				01234NBB_DC r01A					
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± ____ .XXX ± .020 [.51] .XX ± .02 [.5] ANGLES ± ____				MATERIAL:					
												RECYCLED NYLON 6.6					
01A	9.17.26	BWG	DAEI	MRJS	a. ADDED FIVE ADDITIONAL -360 PARTS AND ADDED SHEET 2 .			013106/01				THIRD ANGLE PROJECTION					
00A	8-12-25	BWG	DAEI	DJSL	DRAWING RELEASED			013106/00									
REV	DATE	BY	CHK	APR	DESCRIPTION			ECN	DRAWN BY	DATE	CHK	SCALE	DRAWING NUMBER:		SIZE		
									BWG	8-12-25	DAEI	NONE	01234NBB_DC		B		
													SHT 1 OF 2				

2




1

A



B

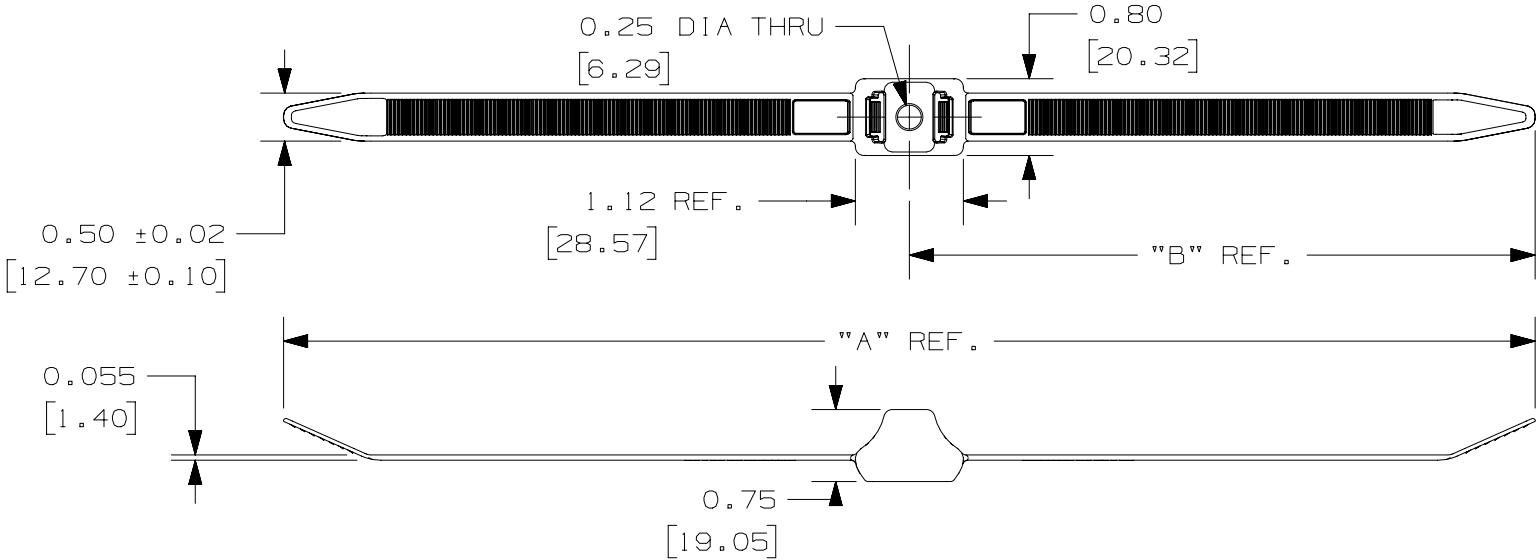

PANDUIT PART NO.	BUNDLE DIA.		"A"	"B"	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs. (g) /100 pcs.
	MIN.	MAX.						
PLDC2.5EH-C360	0.20 (5.1)	2.30 (58)	19.2 (489)	9.63 (244.6)	130 (578)	EXTRA HEAVY	CURVED	2.94 (1330)

NOTE: SEE panduit.com FOR NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE

01A	9.17.26	BWG	DAEI	MRJS	a. ADDED FIVE ADDITIONAL -360 PARTS AND ADDED SHEET 2 .	013106/01
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE			
Post Industrial Recycled (PIR) Cable Ties			
CUSTOMER DRAWING			
ITEM REVISION NAME		01234NBB/01	
DATASET FILE NAME		01234NBB_DC r01A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
.X ± ____ .XXX ± .020 [.51] .XX ± .02 [.5] ANGLES ± ____			
THIRD ANGLE PROJECTION		DRAWING NUMBER: 01234NBB_DC	
DRAWN BY	DATE	CHK	SCALE
BWG	8-12-25	DAEI	NONE
SHT 2 OF 2		SIZE B	