



Model Number

SD3-284TC-6-BR-E-15-460-60

MFG PN

T284T15U6B

List Price

--

All data shown at HIGH voltage setting

Format STD 3 Phase

Electrical Data

General Data

Rated Motor Output Power	15 HP	Frame Size	284
Rated Motor Speed	1180 r/min	Enclosure	TEFC
Rated Motor Voltage (3 Phase)	460-60 Volts - HZ	Approximate Weight	388
Rated Motor Current	28.1 Amps	NEMA Design	B
Service Factor	1.25	IP Rating	56
KVA Code	E	Insulation Class	F
Nominal Efficiency	90.1 %	Tropicalization	YES
Nominal Power Factor	0.78 cosθ	Duty	Cont.
Full Load Torque Ft-Lb	88.39 Ft-Lb	Cable Entry	1.25
Temp Rise @ Full Load °C	46.2	Feet Removable	YES
Efficiency Level	IE3 - NEMA Premium	Double Drilled	NO



Load Data	RPM	Trq %FL	Current Amps	Rated Ambient (°C)	40
Locked Rotor	-	262	124.2	Rated Altitude (M)	1000
Breakdown	-	256	-	Coating	7024 - Graphite Grey
Pull Up	-	236	-	Shaft Grounding	YES
125% of FL	1181	-	24.39	Brake Voltage (DC)	--
75% of FL	1190	-	16.17	Brake Torque (N-M)	--
50% of FL	1193	-	13.03	Mechanical Data	
No Load	1196	-	9.8	Bearing DE Side	6311 C3

Hazardous Location	CL1 Div2 Grp A,B,C,D	Bearing NDE Side	6311 C3
		Moment of Inertia	-- kg.m2
		Noise Level	Per NEMA dB (A)




CT VFD Range	--	Loaded Torque Curves	--
P1 = INPUT POWER (KW), S = Slip (% of Sync RPM), η = Efficiency (%), cosφ = Power Factor			

Certifications	UL	CSA	DOE
File Numbers	323353	224693	096A

Wiring Diagram	3PH Single Voltage SD3
----------------	------------------------

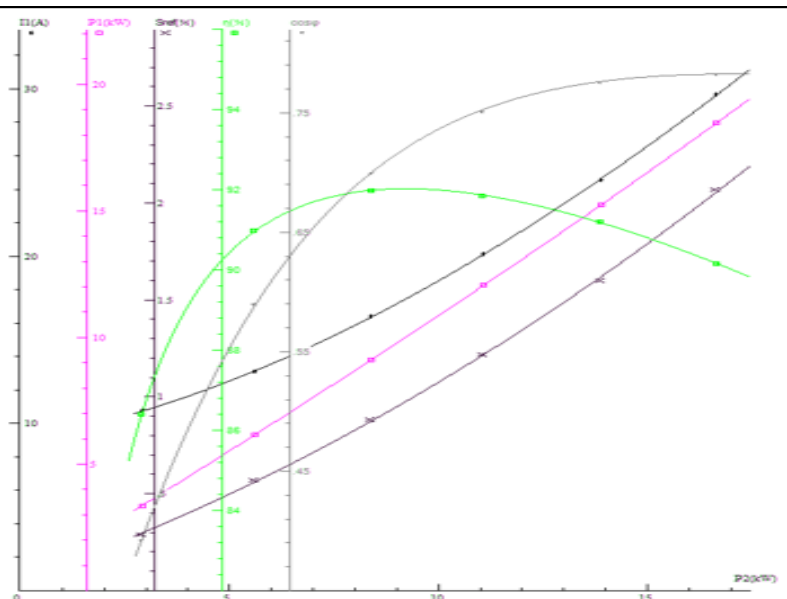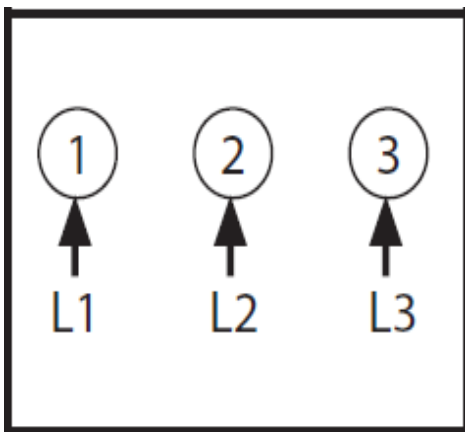

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540

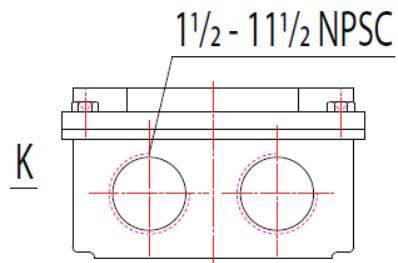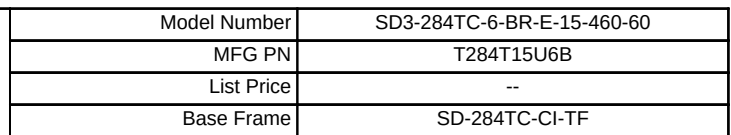

	MODEL NUMBER:	REV	BY	DATE	CHANGES
	GR3-CI-TF-284TC	1			
	MFG PN:	2			
		3			
	MATERIAL:	4			
	UNITS: INCH	5			
	BY: SSEE	6			
DRAWN: 6/26/2018	7				
WWW.TECHTOP.COM					

Techtop Industries -2815 Colonnades Court - Peachtree Corners, GA 30071 - Phone: (678) 436-5540